

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>5</sup> :  F01K 21/04</p>	<p>A1</p>	<p>(11) International Publication Number: <b>WO 94/10427</b>  (43) International Publication Date: 11 May 1994 (11.05.94)</p>
<p>(21) International Application Number: PCT/US93/10280 (22) International Filing Date: 27 October 1993 (27.10.93)  (30) Priority data: 07/967,289 27 October 1992 (27.10.92) US  (60) Parent Application or Grant (63) Related by Continuation US 07/967,289 (CIP) Filed on 27 October 1992 (27.10.92)  (71)(72) Applicant and Inventor: GINTER, J., Lyell [US/US]; 5665 North Fresno, #244, Fresno, CA 93710 (US).</p>		<p>(74) Agent: RAM, Michael, J.; Arant, Kleinberg, Lerner &amp; Ram, 2049 Century Park East, Suite 1080, Los Angeles, CA 90067 (US).  (81) Designated States: AT, AU, BB, BG, BR, BY, CA, CH, CZ, DE, DK, ES, FI, GB, HU, JP, KP, KR, KZ, LK, LU, MG, MN, MW, NL, NO, NZ, PL, PT, RO, RU, SD, SE, SK, UA, US, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).  <b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>

(54) Title: VAPOR-AIR STEAM ENGINE

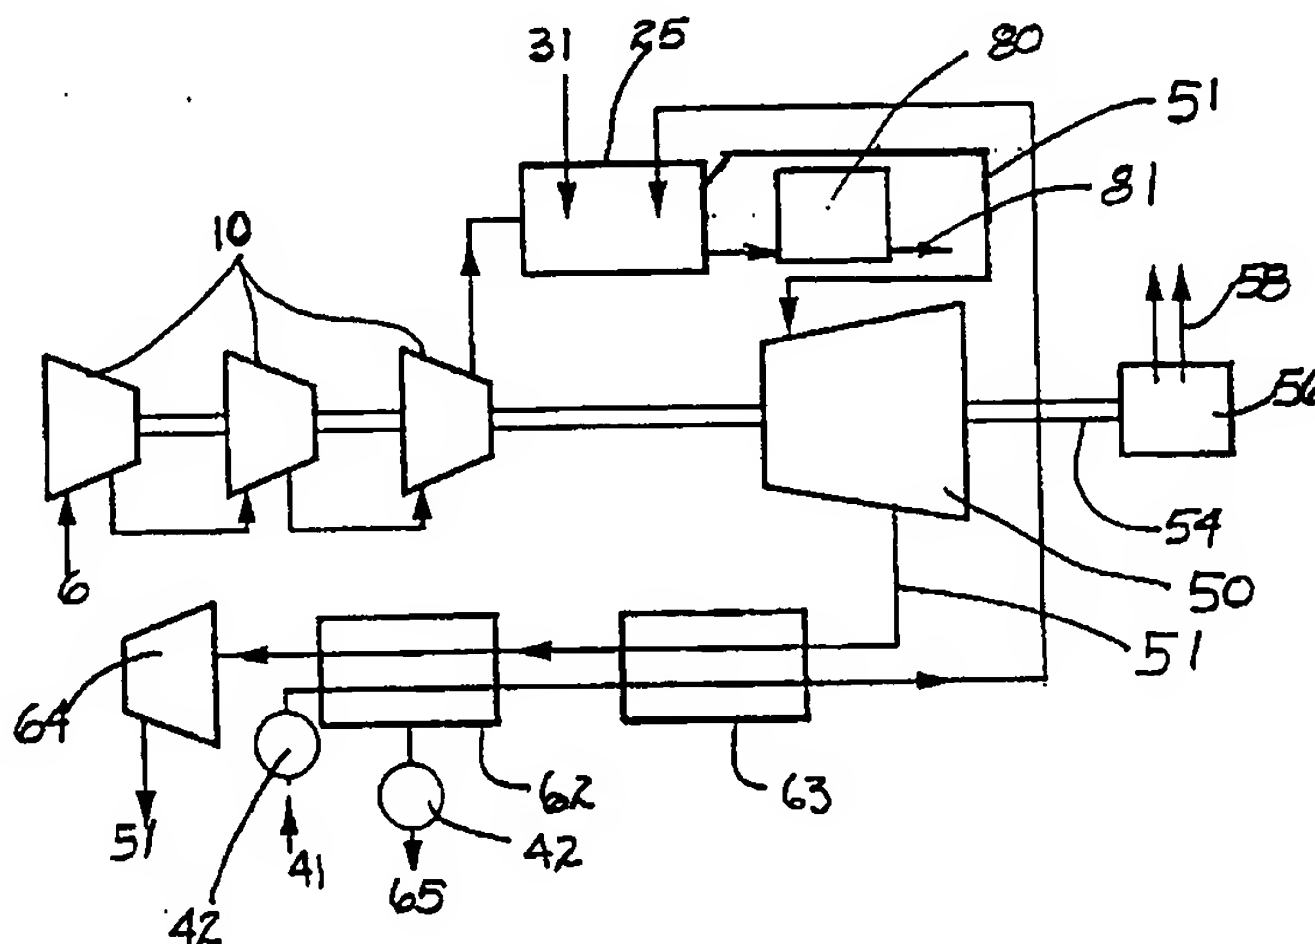

(57) Abstract

A vapor-air steam engine is described which operates at high pressure and utilizes a working fluid consisting of a mixture of compressed uncombusted air components, fuel combustion products and steam. In the new cycle described, working fluid is provided at constant pressure and temperatures. Combustion air is supplied adiabatically by one or more stages of compression. Fuel is injected at pressure as needed. At least about 40 % to all of compressed air is burned. Inert liquid is injected at high pressure to produce steam and thus provide an inert high specific heat diluent vapor required for internal cooling of an internal combustion turbine or other type system. The use of extensive liquid injection inhibits the formation of pollutants, increases the efficiency and horsepower of an engine, and reduces specific fuel consumption. The new cycle may also be operated open or closed; in the latter case, the liquid may be recouped via condensation for regenerative reuse. When salt water is injected into the system potable water is recovered from the steam exiting the power turbine and sterile sea salt is recovered from the combustion chamber.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

**VAPOR-AIR STEAM ENGINE****FIELD OF THE INVENTION**

5           The present invention is directed to a vapor-air  
steam engine which operates at high pressure and utilizes  
a working fluid consisting of a mixture of compressed  
air, fuel combustion products and steam. The invention  
is further directed to processes for producing electrical  
10 energy in a fuel burning system at high efficiency and  
low specific fuel consumption. The invention is still  
further directed to the production of potable water while  
generating electrical power without significantly  
reducing the efficiency or increasing the fuel  
15 consumption.

**BACKGROUND OF THE INVENTION**

Internal combustion engines ("ICEs") are generally  
classified as either constant volume or constant  
pressure. Otto cycle engines operate by exploding  
20 volatile fuel in a constant volume of compressed air near  
top dead center while diesel cycle engines burn fuel in  
a modified cycle, the burning being approximately  
characterized as constant pressure.

External combustion engines ("ECEs") are exemplified  
25 by steam engines and turbines and some forms of gas  
turbines. It has been known to supply a gas turbine with  
a fluid heated and compressed from an external fluid  
supply source and to operate various motor devices from  
energy stored in this compressed gas.

30           It is also known to burn fuel in a chamber and  
exhaust the combustion products into a working cylinder,  
sometimes with the injection of water or steam in  
accordance with the rising temperature. These may also

be classified as ECEs.

Some other devices have been proposed in which combustion chambers are cooled by addition of water or steam internally rather than employing external cooling. Still another form of apparatus has been proposed for operation on fuel injected into a combustion cylinder as the temperature falls, having means to terminate fuel injection when the pressure reaches a desired value.

Each of these prior engines has encountered difficulties which have prevented their general adoption as a power source for the operation of prime movers. Among these difficulties have been the inability of such an engine to meet sudden demand and/or to maintain a constant working temperature or pressure as may be required for efficient operation of such an engine.

Furthermore, control of such engines has been inefficient, and the ability of the gas generator to maintain itself in standby condition has been wholly inadequate. In all practically applied engine configurations the requirement for cooling the confining walls of the work cylinders has resulted in loss of efficiency and a number of other disadvantages previously inherent in ICEs.

The present invention overcomes the limitations of the prior art described above. First, the requirement of air or liquid external cooling is eliminated by injecting water into the combustion process to control the temperature of the resulting working fluid. When water is injected and converted into steam in this way, it becomes a portion of the working fluid itself, thus increasing the volume of working fluid without mechanical compression. The working fluid is increased when excess combustion gas temperature is transformed into steam pressure.

In the present invention, independent control of the

combustion flame temperature and fuel to air ratio is used in order to accommodate the requirements of a working engine. Control of the flame temperature also prevents the formation of  $\text{NO}_x$ , and the disassociation of  $\text{CO}_2$  as described below.

The present invention also utilizes high pressure ratios as a way of increasing efficiency and horsepower while simultaneously lowering specific fuel consumption ("sfc"). When water is injected and converted into steam in the combustion chamber of the present invention, it acquires the pressure of the combustion chamber. It should be noted that this pressure of the combustion chamber is acquired by the steam irrespective of the pressure ratio of the engine. Thus, a higher pressure ratio can be obtained in the engine without expending additional work for performing compression for new steam or water injection. Because of massive water injection used in the present invention, there is no need to compress dilution air typically used in prior art systems for cooling. The elimination of this requirement results in an enormous energy savings to the system.

Because the pressure ratio is increased in a device using water injection as taught in the present invention, several advantages are apparent. To begin with, no additional work is required to compress water or steam further after they have been initially compressed; in other words, after compressing steam to 2 atmospheres, no additional work is required to compress it further to a higher pressure. This is unlike air, for example, for which additional work must be expended to raise it to higher pressures and thus acquire additional working fluid mass. Furthermore, when water is injected and converted to steam in the present invention, it acquires the pressure of the combustion chamber without additional work. This steam also has constant entropy and enthalpy.

In the present invention excess waste heat from combustion is converted to steam pressure and as an additional mass for the working fluid without mechanical compression. In contrast, in a typical Brayton Cycle Turbine, 66% - 75% of the mechanically compressed air is used for air dilution with the products of combustion in order to reduce the temperature of the working fluid to Turbine Inlet Temperature ("TIT") requirements.

Since the steam doubles or more the combustion generated working fluid and produces 15% or more of the net horsepower, the water can be seen to serve as a fuel in this new thermodynamic system because it supplies pressure, power and efficiency to the present system.

The cycle of the present invention may be open or closed with respect to either or both air and water. Desalination or water purification could be a byproduct of electric power generation from a stationary installation or water borne ships, where the cycle is open as to air but closed as to the desalinated water recovery. Marine power plants or irrigation water clean up systems are also viable environments.

The present cycle can also be employed in the closed cycle phase in mobile environments, e.g. autos, trucks, buses, commuter aircraft, general aviation and the like.

#### SUMMARY OF THE INVENTION

One of the objectives of this invention is to provide a new, thermodynamic power cycle which may be open or closed, and that compresses air and stoichiometrically combusts fuel and air so as to provide efficient clean pollution controlled power.

It is also an object of this invention to completely control the temperature of combustion within an engine through the employment of the latent heat of vaporization of water without the necessity to mechanically compress

dilution air.

A further object of this invention is to reduce the air compressor load in relation to a power turbine used in the engine so that slow idling and faster acceleration can be achieved.

A further object of this invention is to separately control the TIT on demand.

Another object of this invention is to vary the composition of working fluid on demand.

It is also an object of this invention to provide sufficient dwell time in milliseconds to permit stoichiometric combustion, bonding, and time for complete quenching and equilibrium balance.

It is also an object of this invention to so combust and to so cool the products of combustion as to prevent the formation of smog causing components such as NO<sub>x</sub>, HC-, CO-, particulates, CO<sub>2</sub> dissociation products, etc.

It is also an object of this invention to provide a combustion system which provides 100% conversion of one pound of chemical energy to one pound of thermal energy.

It is also an object of this invention to operate the entire power system as cool as possible and still operate with good thermal efficiency.

It is also an object of this invention to provide a condensing process to some value of vacuum in order to cool, condense, separate, and reclaim the steam as condensed water.

It is also an object of this invention to provide an electric power generating system which uses sea water as its coolant and produces potable water desalinated as a product of the electric power generation.

It is also an object of this invention to provide a new cycle which incorporates a modified Brayton cycle during the top half of engine operation, and a vapor air



steam cycle during the lower half of engine operation.

It is also an object of this invention to provide a turbine power generating system which produces electrical energy at a greater efficiency and reduced specific fuel consumption when compared with currently available system.

It is also an object of this invention to provide a power generating system which produces electrical energy at an overall efficiency significantly greater than 40%.

In accordance with one exemplary embodiment of the present invention, an internal combustion engine is described. This engine includes a compressor configured for compressing ambient air into compressed air having a pressure greater than or equal to six atmospheres, and having an elevated temperature. A combustion chamber connected to the compressor is configured to duct a progressive flow of compressed air from the compressor. Separate fuel and fluid injection controls are used for injecting fuel and water respectively into the combustion chamber as needed. The amount of compressed air, fuel and fluid injected and the temperature of the injected water are each independently controlled. Thus, the average combustion temperature and the fuel to air ratio can also be independently controlled. The injected fuel and a controlled portion of the compressed air is combusted, and the heat generated transforms the injected fluid into a vapor. The transformation of the injected fluid into a vapor reduces the outlet temperature of the gases exiting the combustion temperature by way of the latent heat of vaporization. An amount of fluid significantly greater than the weight of the fuel of combustion is used. Therefore, the mass flow of combustion generated working fluid may be doubled or greater under most operating conditions.

A working fluid consisting of a mixture of



compressed air, fuel combustion products and vapor is thus generated in the combustion chamber during combustion at a predetermined combustion temperature. This working fluid can then be supplied to one or more work engines for performing useful work.

In more specific embodiments of the present invention, an ignition sparker is used to start the engine. The engine may also be operated either open or closed; in the latter case, a portion of the working fluid exhaust may be recuperated. The combustion chamber temperature is determined based on information from temperature detectors and thermostats located therein.

When the present invention is used, the combustion temperature is reduced by the combustion control means so that stoichiometric bonding and equilibrium is achieved in the working fluid. All chemical energy in the injected fuel is converted during combustion into thermal energy and the vaporization of water into steam creates cyclonic turbulence that assists molecular mixing of the fuel and air such that greater stoichiometric combustion is effectuated. The injected water absorbs all the excess heat energy so as to reduce the temperature of the working fluid below that of a maximum operating temperature of the work engine. When the injected water is transformed into steam, it assumes the pressure of the combustion chamber, without additional work for compression and without additional entropy or enthalpy. The careful control of combustion temperature prevents the formations of gases and compounds that cause or contribute to the formation of atmospheric smog.

In another embodiment of the present invention, electric power is generated which uses sea water as its coolant, and which produces potable water desalinated as a product of the electric power generation.

In a third embodiment of the present invention, a

new cycle is described for an engine, so that when the engine is operated in excess of a first predetermined rpm, water injection and the portion of compressed air combusted is constant as engine rpm increases. In  
5 between the first and second predetermined rpm, water/fuel is increased, the percentage of air combusted is increased, and combusted air is varied. When the engine is operated below the second predetermined rpm, water injection is proportional to fuel and constant  
10 while the percent of compressed air combusted is held constant.

The use of such a cycle results in increased horsepower, low rpm, slow idle, fast acceleration and combustion of up to 95% of the compressed air at low rpm.

15 A more complete understanding of the invention and further objects and advantages thereof will become apparent from a consideration of the accompanying drawings and the following detailed description. The scope of the present invention is set forth with  
20 particularity in the appended claims.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

FIG.1 is a block diagram of a vapor-air steam turbine engine in accordance with a present invention;

25 FIG.2 is a diagram describing the pressure and volume relationship of the thermodynamic process used in the present invention;

FIG.3 is a diagram describing the temperature and entropy relationship of the thermodynamic process used in the present invention.

30 FIG.4 is a block diagram of a vapor-air steam turbine engine that includes means for desalinating seawater to obtain potable water in accordance with the present invention;

FIG. 5 is a schematic drawing of one embodiment of

the vapor-air steam turbine engine shown by a block diagram in Figure 4.

FIG. 6 is a schematic drawing of a second embodiment of a vapor-air steam turbine engine with desalination capabilities incorporating features of the invention.

FIG. 7 is a graph showing the effect of pressure ratio on thermal efficiency for the vapor-air steam turbine engine of Figure 1.

FIG. 8 is a graph showing the effect of effect of pressure ratio on specific fuel consumption for the vapor-air steam turbine engine of Figure 1.

FIG. 9 is a graph showing the pressure ratio on turbine power for the vapor-air steam turbine engine of Figure 1.

FIG. 10 is a graph of the effect of pressure ratio on net power for the vapor-air steam turbine engine of Figure 1.

#### DETAILED DESCRIPTION OF THE INVENTION

##### A. Basic Configuration Of The Present System

Referring now to FIG. 1, there is shown schematically a gas turbine engine embodying the teachings of the present invention. Ambient air 6 is compressed by compressor 10 to a desired pressure ratio resulting in compressed air 11. In a preferred embodiment, compressor 10 is a typical well-known three stage compressor, and the ambient air is compressed to a pressure greater than four atmospheres, and preferably 22 atmospheres, at a temperature of approximately 1400° R.

The compressed air 11 is supplied by an air flow controller 27 to a combustor 25. Combustors are well-known in the art, and, in the present invention, the compressed air 11 may be supplied in a staged, circumferential manner by air flow control 27 similar to that shown in U.S. Patent No. 3,651,641 (Ginter) which is

hereby incorporated by reference. The compressed air 11 is fed in stages by air flow controller 27 in order to keep combustion (flame temperatures) low in combustion chamber 25.

5           Fuel 31 is injected under pressure by fuel injection control 30. Fuel injection control is also well-known to skilled artisans, and fuel injection control 30 used in the present invention can consist of a series of conventional single or multiple fuel feed nozzles. A  
10           pressurized fuel supply (not shown) is used to supply fuel, which can be any conventional hydrocarbon fuel, such as diesel fuel #2 heating oil, preferably sulfur free and alcohols such as ethanol. Ethanol may be  
15           preferable in some applications because it includes or can be mixed with at least some water which may be used for cooling combustion products, thus reducing the requirement for injected water. Also ethanol water mixtures have a much lower freezing point thus increasing the ability to use the engine in climates which have  
20           temperatures below 32°F.

          Water 41 is injected at pressure by water injection control 40 and may be atomized through one or more nozzles into, during and downstream of combustion in combustion chamber 25 as explained further below.

25           Temperature within combustor 25 is controlled by combustion controller 100 operating in conjunction with other elements of the present invention detailed above. Combustion controller 100 may be a conventionally  
30           programmed microprocessor with supporting digital logic, a microcomputer or any other well-known device for monitoring and effectuating control in response to feedback signals from monitors located in the combustion chamber 25 or associated with the other components of the present system.

35           For example, pressure within combustor 25 can be

maintained by air compressor 10 in response to variations in engine rpm. Temperature detectors and thermostats (not shown) within combustor 25 provide temperature information to combustion control 100 which then directs water injection control 40 to inject more or less water as needed. Similarly, working fluid mass is controlled by combustion control 100 by varying the mixture of fuel, water and air combusted in combustor 25.

There are certain well-known practical limitations which regulate the acceptable high end of combustion temperature. Foremost among these considerations is the maximum TIT which can be accommodated by any system. To effectuate the desired maximum TIT, water injection control 40 injects water as needed to the working fluid to keep the combustion temperature within acceptable limits. The injected water absorbs a substantial amount of the combustion flame heat through the latent heat of evaporation of such water as it is converted to steam at the pressure of combustor 25.

For ignition of the fuel injected into combustor 25, a pressure ratio of greater than 12:1 is needed to effectuate self-compression ignition. A standard ignition sparkler (not shown) can be used with lower pressure ratios, however.

As mentioned above, combustion controller 100 independently controls the amount of combusted compressed air from air flow control 27, fuel injection control 30, and water injection control 40 so as to combust the injected fuel and a portion of the compressed air. At least 95% of the compressed air is combusted. If less than 100% of the  $O_2$  is combusted then this leaves sufficient  $O_2$  to complete stoichiometric bonding and for acceleration. When 100% of the air is consumed in the combustion process, forming  $CO_2$ , no oxygen is available to form  $NO_x$ . The heat of combustion also transforms the

injected water into steam, thus resulting in a working fluid 21 consisting of a mixture of compressed, non-combustible components of air, fuel combustion products and steam being generated in the combustion chamber. Pressure ratios from 4:1 to 100:1 may be supplied by compressor 10. TIT temperatures may vary from 750°F to 2300°F with the higher limit being dictated by material considerations.

A work engine 50, typically a turbine, is coupled to and receives the working fluid 51 from combustion chamber 25 for performing useful work (such as by rotating a shaft 54 for example) which, in turn drives a generator 56 which produces electric energy 58. While the present invention discusses the use of a turbine as a work engine, skilled artisans will appreciate that reciprocating, Wankel, cam or other type of work engines may be driven by the working fluid created by the present invention.

The working fluid expands as it passes by work engine 50. After expansion the working fluid 51 is exhausted by exhaust control 60 at varying pressure (anywhere from 0.1 atmospheres on up) depending on whether a closed cycle with vacuum pump or open cycle is used. Exhaust control 60 may also include a heat exchanger 63 and/or condenser 62 for condensing the steam 61 from the working fluid 51 as well as a recompressor 64 for exhausting the working fluid 51. The steam condensed in condenser 62 exits as potable water 65.

## B. Thermodynamic Processes Employed In Present Cycle

### 1. General Explanation

When a combustor as described is employed in a practical engine, a number of thermodynamic advantages are obtained. These will best be understood by reference to the thermodynamic processes of the cycle used in the



present invention as shown schematically in P-V and T-S diagrams in Figures 2 and 3. The present invention, which utilizes vapor, air and steam in conjunction with a work turbine, is referred to as the VAST™ cycle; VAST being a trademark owned by applicant.

The following parameters were used in plotting the diagrams shown in Figures 2 and 3:

Pressure Ratio = 22/1

3-Stage Compressor 10

Turbine inlet temperature - 1800°F

Fuel - air ratio = 0.066

1 lb. air per second

Water inlet temperature - 212°F

Efficiency of compressors used in Compressor 10 =

85%

Efficiency of Work Engine (Turbine) 50 = 85%

However, as discussed below, these operating parameters are merely representative of an embodiment incorporating features of the invention. The pressure ratio, turbine inlet temperature, and water inlet temperature can be varied as required by the application in which the VAST cycle is used. Additionally, the fuel/air ratio changes depending on the type of fuel used to assure stoichiometric quantities and the compressor and turbine efficiency can be increased by use of more efficient designs. Further, Figures 2 and 3 were calculated using one pound of air per second. Increasing the air feed while maintaining fuel/air constant results in a proportional increase in the power output.

The VAST cycle is a combination of a compressed air work cycle and a steam cycle since both air and steam are present as a working fluid wherein each makes up a portion of the total pressure developed in the combustor. In the present discussion, it will be understood that the term "air" is intended to include fuel as combusted by



the inlet compressed air together with any excess of compressed air which may be present, and thus includes all of the products of combustion, while the term "steam" refers to water which is injected in the liquid state to become superheated steam, but which also is used in a work cycle with a change of state in which a part of the steam becomes liquid water. The new cycle or process of burning fuel makes use of the combined steam and air as a working fluid, with the exception of the compression process in which air only is involved.

A discussion of the thermodynamic processes in the VAST cycle now follows. As shown in Figures 2 and 3, processes 1-2 and 2-3 show the compression in the compressors of three stage compressor 10. The exit conditions at the outlet of compressor 10 are calculated using isentropic relations for compression and the real conditions are calculated using a compressor efficiency of 85%.

As explained above, compressed air enters combustion chamber 25 through air flow control 27. The combustion chamber process is shown in Figures 2 and 3 as processes 3-4.

The combustion chamber 25 burns fuel at constant pressure under conditions also approximating constant temperature burning. The temperature is completely controllable since there are independent fuel, air and water controls. Compressed air input to the combustor, after start-up, is at constant pressure. Thus, the combination of the air feed at a constant pressure and a fixed fuel/air ratio in combination with control of the TIT by water injection results in a constant pressure in the combustion chamber. Burning occurs in the combustor immediately following injection of fuel under high pressure and provides idealized burning conditions for efficiency and avoidance of air contaminants in which the

fuel mixture may at first be richer than the mixture for complete combustion, additional air being added as burning continues, this air being added circumferentially around the burning fuel and in an amount which, as a minimum equals the amounts necessary for complete combustion, a stoichiometric amount, but can ultimately exceed that necessary for complete combustion of the fuel components. A minimum of about 95% of the compressed air is combusted in order to leave sufficient  $O_2$  to complete stoichiometric bonding and for acceleration.

Water at high pressure, which may be as high as 4000 psi or greater, is injected by water injection control 40. Due to the high temperatures in the combustion chamber 25, the injected water is instantaneously flashed into steam and mixes with the combustion gases. Again, the amount of water that is added into the combustion chamber 25 depends on the prescribed turbine inlet temperature (TIT) and the temperature of the water just prior to injection. Part of the heat released during the combustion of fuel is used to raise the temperature of the compressed air from the three stage compressor 10 to the TIT. The remaining heat of combustion is used to convert the injected water into steam. This process is represented in Figures 2 and 3 by the portions on these diagrams designated 3-4.

The general explanation which follows sets forth a single set of operating conditions for system using #2 diesel fuel. In particular, a pressure ratio of 22/1, a turbine inlet temperature of 1800°F, a turbine outlet pressure of 1 atmosphere and a water inlet temperature of 212°F are indicated. Additionally, the efficiency of the compressor and the work engine have been conservatively set at 85%. This resulted in a net horsepower of 455.11, an SFC of 0.522 and an efficiency of 0.251 (data table). The examples calculated in the attached computer printout

of a simulated process and listed in the data tables show the result of varying the pressure ratio from 10 to 50 with the f/a, water temperature and turbine inlet temperature held constant.

5           In a like manner, other operating conditions can be varied. For example the water temperature can be increased, the maximum temperature being not greater than the desired TIT. Preferentially, the water temperature is not increased to a temperature greater than about 50°F  
10 below the desired TIT. However, for practical reasons, since the working fluid exiting the turbine is used to heat the feed water, the inlet water is usually held to no more than about 50°F below the turbine exit temperature. The higher the water temperature the  
15 greater the volume of water necessary to reduce the combustion temperature to the TIT, thus resulting in a greater volume of gases flowing to the turbine and a greater power output. Likewise the TIT can be raised or lowered. Examples 1-10 in the data table were calculated  
20 at a TIT equal to 1800°F. This is the generally accepted maximum for turbines which do not utilize high temperature alloys or hollow blade cooling with either air or steam. However, utilization of high temperature and/or corrosion resistant alloys, high temperature  
25 composites, ceramics and other materials designed for high temperature operation, such as used in turbine jet engines will allow operation as high as 2300°F. Examples 11-16 illustrate operation at more elevated temperatures.

30           Examples 1-5 of Table 1 show the effect on horsepower, efficiency and SFC by increasing the air compression ratio. The effect of raising inlet water temperature and reducing the exit pressure (calculated at a turbine efficiency and compressor efficiency of 85%) is shown in Examples 6-10. Examples 11-16 show the effect  
35 of air compression ratio on a system with a TIT of

2000°F, a turbine exit pressure of 0.5 atmosphere and a H<sub>2</sub>O inlet pressure of about 625 to about 700°F when calculated at an assumed turbine efficiency of 90%. It should be noted that a turbine efficiency of 93% is claimed by currently available air compression axial turbines and the power turbine expander train.

In examples 1 through 16, the fuel is diesel #2 and the fuel to air ratio is 0.066, which is the stoichiometric ratio for #2 diesel fuel. With other fuels a different f/a ratio is required to maintain stoichiometric conditions. Example 17 uses methane and a f/a = 0.058. Because methane burns more efficiently than diesel fuel, less fuel per pound of air is used and, as a result, less water is added.

TABLE 1  
Closed Cycle

Ex.	Air Comp. Ratio	Turbine Efficiency, %	H <sub>2</sub> O Inlet Temp., °F	TIT °F	Turbine Exit Press atmospheres	HP	EFF	SFC
1	10:1	85	212	1800	1	376.53	.208	.631
2	22:1	85	212	1800	1	455.11	.251	.522
3	30:1	85	212	1800	1	477.97	.267	.497
4	40:1	85	212	1800	1	495.94	.274	.479
5	50:1	85	212	1800	1	507.51	.280	.468
6	22:1	85	410	1800	1	490.89	.271	.484
7	22:1	85	410	1800	.5	543.09	.300	.437
8	22:1	85	410	1800	.25	556.39	.307	.427
9	22:1	85	600	1800	.5	612.59	.338	.388
10	22:1	85	665	1800	.5	656.96	.363	.362
11	5:1	90	700	2000	.5	611.76	.334	.388
12	10:1	90	704	2000	.5	754.69	.412	.315
13	15:1	90	697	2000	.5	813.72	.444	.292
14	20:0	90	677	2000	.5	832.78	.455	.285
15	25:0	90	653	2000	.5	843.07	.460	.282
16	30:0	90	629	2000	.5	848.41	.464	.280
17	29:0	93	664	2175	.5	840.31	.475	.250

5

10

15

20

Example 17 is also calculated at a turbine efficiency of 93%, and a turbine inlet temperature of 2175°F which are both claimed as operating parameters of commercially available turbines (which do not use the claimed invention.)

The effect of changing air compression ratio on the performance of the systems listed in examples 11-16 are plotted on Figures 7-10.

The combustor of the invention differs from prior devices in a fundamental aspect since the working fluid may be increased either at constant pressure, constant temperature or both. Constant temperature is maintained by combustion controller 100 through controlled water injection by water injection control 40 in response to temperature monitors (thermostats) in combustor 25. Within combustor 25, typical combustion temperatures for liquid hydrocarbon fuels reach about 3,000° to 3,800°F when a stoichiometric amount or a small excess of compressed air is supplied by compressor 10. Larger quantities of excess air would of course reduce the resulting combustion temperature but would not greatly affect the actual temperature of burning or the ignition temperature.

The practical limit of the discharge temperature from the combustor 25 is in turn governed by the material strength of the containing walls at the discharge temperature, the high temperature tolerance of the combustor walls, the materials of construction of the power turbine, and whether the turbine blades are separately cooled, either externally or internally. This discharge temperature is controlled between suitable limits by variation in the injection of high pressure water which then flashes to steam the heat of the vaporization and superheat being equated to the heat of combustion of the fuel being burned. (The temperature of

the burning fuel is reduced to the desired TIT by the heat of vaporization and superheat as the water vaporizes and then heats up to the TIT). The quantity of injected water is thus determined by the desired operating temperature, being less for high superheats, but actually maintaining a fixed operating temperature.

The working pressure is kept constant by compressor 10 as required by any give engine rpm.

The resulting working fluid mixture of combustion gases and steam is then passed into a working engine 50 (typically a turbine as explained above) where expansion of steam - gas mixture takes place. The exit conditions at the outlet of working engine 50 are calculated using isentropic relations and turbine efficiency. This process is shown in Figures 1 and 2 by 4-5.

The exhaust gases and steam from work engine 50 are then passed through an exhaust control 60. Exhaust control 60 includes a condenser where the temperature is reduced to the saturation temperature corresponding to the partial pressure of steam in the exhaust. The steam in the turbine exhaust is thus condensed and pumped back into the combustion chamber 25 by water injection control 40. The remaining combustion gases are then passed through a secondary compressor where the pressure is raised back to the atmospheric pressure so that it can be exhausted into the atmosphere.

It can be seen that the present invention makes substantial advantage of the latent heat of vaporization of water. When water is injected into a combustion chamber, and steam is created, several useful results occur: (1) the steam assumes its own partial pressure; (2) the total pressure in the combustor will be the pressure of the combustion chamber as maintained by the air compressor; (3) the steam pressure is without mechanical cost, except a small amount to pump in the



water at pressure; (4) the steam pressure at high levels is obtained without mechanical compression, except the water, with steam at constant entropy and enthalpy. The water conversion to steam also cools the combustion gases, resulting in the pollution control described below.

## 2. Pollution Control

Any type of combustion tends to produce products which react in air to form smog, whether in engines or industrial furnaces, although of different kinds. The present invention reduces the formation of pollution products in several ways discussed below.

First, internal combustion engines operated with cooled cylinder walls and heads have boundary layer cooling of fuel-air mixtures sufficient to result in small percentages of unburned hydrocarbons emitted during the exhaust stroke. The present invention avoids combustion chamber wall cooling in two distinct ways to keep the burning temperature for the fuel high, both of which are shown in more detail in U.S. Patent No. 3,651,641 mentioned previously. First, hot compressed air is made to flow by air flow control 27 around an exterior wall of combustor 25 such that combustion occurs only within a small space heated above ignition temperatures. Second, the combustion flame is shielded with air unmixed with fuel. Thus, a hot wall combustion, preferably above 2000°F, is utilized in an engine operating on the present cycle.

Next, smog products are also inhibited by operating the combustor 25 within a defined temperature range. For example, CO and other products of partial combustion are inhibited by high temperature burning, preferably well above 2000°F, and by retaining such products for a considerable dwell time after start of burning. At too

high a temperature, however, more nitrous and nitric oxides are formed. Accordingly, neither extremely high nor extremely low temperatures are acceptable for reducing smog products. The combustion controller 100 in the present invention commences burning of the fuel and air at high temperature, then reduces that temperature for a considerable dwell time and then cools (after completion of the burning) to a predefined, smog-inhibiting temperature by the use of water injection. Thus, combustion is first performed in a rich mixture; then sufficient compressed air is added to allow complete combustion of the fuel with a minimum of excess oxygen and to cool the gases below about 3000°F for about half of the dwell time in the combustion chamber 25; and then water injection is directly added to combustion or upstream by water injection control 40 to maintain an acceptable temperature that assures complete burning of all the hydrocarbons.

In typical engines, hydrocarbon fuels are often burned in a mixture with air a little richer in fuel, i.e., at less than stoichiometric proportions in order to increase efficiency. This, however, results in excess CO and more complex products of incomplete combustion. The present invention, however, because it provides a progressive supply of air through air flow control 27, dilutes the combustion and further reduces such smog products.

Oxides of nitrogen also form more rapidly at higher temperatures as explained above, but can also be reduced by the controlled dilution of the combustion products with additional compressed air.

The present combustion cycle is compatible with complete and efficient fuel burning and eliminates incomplete combustion products and reduces other products such as nitrogen oxides. Combustion controller 100 burns

the combustion products at a considerable initial dwell time, after which the products of combustion and excess air are then cooled to an acceptable engine working temperature, which may be in the range of 1000°F to 1800°F, or even as high as 2300°F if proper materials of construction are used in the turbine, or may be as low as 700°F to 800°F.

An equilibrium condition can be created by making combustion chamber 25 anywhere from two to four times the length of the burning zone within combustion chamber 25; however, any properly designed combustion chamber may be used.

A burning as described provides a method of reducing smog-forming elements while at the same time, providing a complete conversion of fuel energy to fluid energy.

The VAST cycle is a low pollution combustion system because the fuel-air ratio and flame temperature are controlled independently. The control of fuel-air ratio, particularly the opportunity to burn all of the compressed air (or to dilute with large amounts of compressed air, if desired) inhibits the occurrence of unburned hydrocarbon and carbon monoxide resulting from incomplete combustion. The use of an inert diluent rather than air permits control of the formation of oxides of nitrogen and represses the formation of carbon monoxide formed by the dissociation of carbon dioxide at high temperature. The use of diluents of high specific heat, such as water or steam, as explained above, reduces the quantity of diluent required for temperature control. In the case of oxides of nitrogen, it should be noted that the VAST cycle inhibits their formation rather than, as is true in some systems, allowing them to form and then attempting the difficult task of removing them. The net result of all of these factors is that VAST operates under a wide range of conditions with negligible

pollution levels, often below the limits of detection of hydrocarbons and oxides of nitrogen using mass spectroscopic techniques.

5 The combustor 25 represents a mechanism for using heat and water to create a high temperature working fluid without the inefficiencies that result when the heat must be transmitted through a heat exchanger to a flash vaporizer or a boiler. The addition of water rather than merely heated gas to the products of combustion  
10 represents a means for using a fluid source for gas, water flashing to steam which provides a very efficient source of mass and pressure and at the same time gives tremendous flexibility in terms of temperature, volume, and the other factors which can be controlled  
15 independently. An additional degree of freedom is created by the addition of water. Injected water, when added during the combustion process, or to quench the combustion process, greatly reduces contamination that results from most combustion processes.

20 There is only about 30% as much nitrogen in the combusted gases of the combustion chamber 25 when compared to a normal air dilution open cycle Brayton engine of any form or model because water rather than excess air is used for cooling and the amount of air fed  
25 to the system is thus greatly reduced. Water cyclonically expands as it forms steam, and creates a molecular activity unsurpassed in controlled internal combustion.

### 3. Water Injection

30 Water injection control 40 controls the injection of water 41 through nozzles, arranged for spraying a fine mist of water in the chamber. Water may be injected into an engine in one or more areas, including: atomized into intake air before compressor 10 sprayed into the

25

compressed air stream generated by compressor 10; atomized around or within the fuel nozzle or a multiplicity of fuel nozzles; atomized into the combustion flame in combustion chamber 25, or into the combustion gases at any desired pressure; or downstream into the combustion gases prior to their passage into work engine 50. Other areas can be readily envisioned by the skilled artisan. As described earlier, the amount of water injected is based on the temperature of the combustion products as monitored by thermostats in combustion chamber 25. The amount of water injected is also dependent on the system using the VAST cycle. For example, if the water is recycled as for use in a motor vehicle, the water is cooled as much as possible to obtain a usable balance between total water used and power output, i.e., if the inlet water temperature is low and the TIT is high a small volume of water can be used to reduce the combustion temperature to the TIT. On the other hand, if a major purpose of the system is to produce potable water from salt water, as discussed below; while generating electrical energy, the water inlet temperature would be raised as high as possible while the TIT is lowered.

### C. Other Embodiments Of Present Invention

#### 25 1. Power Plant Including Water Desalination

In the case of electric power generation using sea water as a coolant, the cycle is open as to air and electric power, and the water used as shown in Figures 4 and 5. Seawater 41, moved by pump 42, is heated as it passes through condenser 62 and heat exchanger 63 countercurrent to exiting hot working fluid 51 and is flash vaporized in a larger version of combustion chamber 25 described above. Increasing the diameter of the combustion chamber also reduces the velocity of the

working fluid in order to ensure better salt removal.

5 The typical temperature of operation of the combustor (1500°F to 2300°F) is above the melting point but significantly below the boiling point of the salts in  
10 sea water (85% of sea salt is NaCl; an additional 14% is composed of MgCl<sub>2</sub>, MgSO<sub>4</sub>, CaCl<sub>2</sub>, and KCl). Therefore, when the sea water flashes to steam the salts rain out as a liquid. For example, NaCl melts at 1473°F and boils at 2575°F, the other salts have lower melting points and  
15 higher boiling points. As a result the molten salts are readily collected along the bottom wall of the combustor and the liquid salts can be removed by a screw assembly on the bottom of the combustor, fed through an extruder and die where it can be formed into rods or pellets, or  
20 sprayed through nozzles, using the pressure in the combustor as the driving force, into a cooling chamber where it can be deposited as flakes, powder, or pellets of any desired size or shape by selection of the proper spray nozzle dimensions and configuration. Because the salt water is exposed to extremely high temperatures in the combustion chamber the salt recovered is sterile and free of organic matter.

25 Water on the order of 6 to 12 times fuel by weight is atomized into the combustion flame and vaporized in milliseconds. Salt or impurities entrained in the steam are separated from steam by crystallization, precipitation and/or filtering until the steam is pure.

30 Salt collection and removal mechanism 80 can be accomplished by any of a number of well-known means from combustion chamber 25, such as by a rotary longitudinal auger. This auger is sealed as not to bypass much pressurized working gases as it rotates and removes the precipitated salt. As mentioned above, an alternative is to spray the molten salt through spray nozzles into a  
35 collecting tower or extrude the salt 81 into strands or



rods which can then be cut to desired sizes. A still further alternative is to drain the molten salt directly into molds to form salt blocks 81 which are then easy to transport and use in chemical processing.

5           The resulting working fluid, which now includes pure water steam, may be used in a standard steam turbine or a multiplicity of turbines. Following work production by the expanding steam-gas mixture, a condenser 62 condenses steam 61 resulting in a source of usable potable water  
10       65. Using this open cycle at pressure ratios of 10:1 or 50:1 or higher electric power may be generated at good efficiencies and specific fuel consumption.

          Figure 6 shows a second embodiment of a desalination unit using the VAST cycle. In this embodiment, the  
15       efficiency of the system is further increased by capturing additional waste heat from the combustion chamber 25. The combustion chamber 25 is enclosed in a double shell heat exchanger 90. In the version shown the hot compressed air 11 exiting the compressor 10 passes  
20       through the shell 92 immediately surrounding the combustion chamber 25 before it enters the combustor 25. The cold sea water 41 is fed to a second shell 94 which surrounds the first shell 92. In this manner the air 11 absorbs additional heat normally lost from the combustor  
25       25 and the incoming sea water 41 absorbs some of the heat from the compressed air 11. An additional benefit, since the air 11 is at an elevated pressure, is that the pressure differential across the combustion chamber 25 wall (i.e. the difference between the combustor interior  
30       and ambient conditions as in Figure 5 or the difference between the combustor interior and the compressed air 11) is significantly reduced, thus reducing the stress on the combustor wall from the combination of high temperature and high pressure. The sea water 41 after passing  
35       through the combustion chamber outer shell 94 then



proceeds through the condenser 62 and the heat exchanger 73 to acquire the desired injection temperature. Care is taken to maintain the water under pressure possibly as high as 4000 psi so that, as the water is heated, it does not convert to steam until it is injected into the combustion chamber 25 which is at a higher temperature and, in most instances, a lower pressure than the superheated sea water 41.

Purification of contaminated waste products, treatment of solid, liquid and gaseous waste products from commercial processes resulting in useable products with power production as a by-product are also potential applications of an engine employing the VAST cycle. Waste water from dried solid waste products may be used in the present invention, resulting in filtered, useable water as one byproduct. The combustible materials are additional fuel for burning in the combustor 25 and the inorganic dried waste products may then be used to create fertilizers. As is apparent, other chemicals can be extracted from solid and liquid products using the present invention. Sewage treatment is also an application. Other applications include water softening, steam source in conjunction with oil field drilling operations and well production, recovery and recycling of irrigation water along with fertilizer and minerals leached from the soil, etc.

## 2. Hybrid Brayton and VAST cycle

Another embodiment of the present invention utilizes a hybrid Brayton-VAST cycle. Basically, in operations in excess of 20,000 rpm, water injection is constant in an amount approximately equal to fuel in weight, while the portion of compressed air combusted proportionately decreases as engine rpm increases. Below, 20,000 rpm, water injection and the portion of compressed air

combusted are proportionately increased. At a cross-over between 20,000 to 10,000 for example, the portion of compressed air combusted increases from approximately 25% to 95%. Below 10,000, the amount of combusted air is held constant, while the amount of water injection increases to a level equal to 7 to 12 times the weight of fuel.

Thus, a Brayton Cycle is employed in the top half operating from twenty thousand rpm up to a maximum of about forty five thousand rpm or more. The lower half of the process employs a VAST Cycle of internally cooling with water. Crossover occurs at 20,000 rpm where a normal Brayton Cycle begins to lose power. The crossover continues over the range of 20,000 to 10,000 rpm. At 10,000 rpm the engine is purely a VAST Cycle, fully cooled by water.

In such a system, horsepower is multiplied by a factor of three plus to one as rpm decreases from 20,000 to 10,000 because as the engine converts from Brayton to VAST at 20,000 rpm it cuts back on air dilution and adds more water for cooling. Below 10,000 rpm the engine operates on VAST only, cooling via water and combusting at least about 95% of the compressed air. Some advantages are the increased horsepower, low rpm, slow idle, fast acceleration and combustion of substantially all of the compressed air with complete pollution control at all levels of rpm.

### 3. Aircraft Engines

The VAST cycle described about, particularly when operated with recycled water, is particularly efficient and has a relatively low fuel consumption when used in commercial air craft which normally operates at 30,000 to 40,000 feet. At such elevations ambient pressure is 0.1 to 0.25 atmospheres or lower and ambient temperature is well below 0°F. Examples 6-8 illustrate the benefit of

lowering turbine exit pressure. However, to generate turbine exit pressures below atmosphere, such as when operating the system at sea level, a vacuum pump on the turbine exit is necessary. This pump, which consumes energy generated by the system, reduces the usable energy and efficiency of the system. Irrespective of taking into consideration the energy consumed by the vacuum pump, horsepower and efficiency of the system is increased and fuel consumption is reduced.

Elimination of the turbine exit vacuum pump by operating in an environment with pressures less than atmosphere, such as at elevations greater than about 30,000 feet, increases the usable power output of the system, and therefore, reduces fuel consumption. Further, if the water in the system is to be recycled, the ambient air temperature can be used to condense and cool the exiting gas stream and separate the water for recycling.

#### D. Data tables

Listed below are data tables containing detailed information on the performance of an engine designed in accordance with the teachings of the present invention. These data tables were generated using a computer simulation program.

Certain abbreviations used in the table include:

f/a ratio = fuel to air ratio

turbine exit pressure = 1 (atmospheres)

gamma compr. =  $\Gamma = C_p/C_v$

All temperatures are in Rankin = (R)

cpmix = mixed  $C_p$  for air + steam

sfc = specific fuel consumption

eff = efficiency

The example in the data table at a pressure ratio of 22:1 is Example 1 in Table 1 above. The text of the

5 computer program used for simulating operation of the engine specified that the water inlet temperature was 212°F (672°R), the TIT was 1800°F (2260°R), the temperature entering the first compressor stage was 60°F (520°R) and each compressor stage and the turbine operated at an 85% efficiency.

VAST CYCLE OPERATED AT PRESSURE RATIO OF 10:1

f/a ratio = .066  
 Pressure Ratio = 10.000  
 Number of Compression Stages= 3  
 Inlet Water Temperature=672.000<sup>°F</sup>  
 Turbine Exit Pressure= 1.000  
 1 lb/s of air with Turbine Inlet Temp. (R)= 2260.000  
 gamma compr. 1= 1.395088723469110 583.127002349018800  
 gamma compr. 2= 1.393245781855153 749.390666288273000  
 gamma compr. 3= 1.382644396697381 960.403717287130800  
 CPGAS in the burner= 3.048731265150463E-001 1678.944055  
 144487000  
 Comp. Inlet Temp, T1= 520.00  
 1 st Stage Outlet Temp, T2d (R)= 668.53  
 2 nd Stage Outlet Temp, T3D (R)= 858.78  
 3 rd Stage Outlet Temp, T4d (R)= 1097.89  
 Mass Flow Rate of Water (lb/s), = .442  
 gamma in turbine= 1.274667679410808 1818.01300684155  
 9000  
 cpmix in the turbine= 3.894133323049679E-001 1818.013006  
 841559000  
 partial press. of steam (atm)= 5.885070348102550  
 partial press. of air (atm)= 8.814929461162587  
 SAT. TEMP. AT TURBINE OUTLET (R)= 591.701098285192200  
 gamma in sec. comp = 1.346058430899532 633.271250898951  
 400  
 cpmix in SEC. COMP = 3.253198837676842E-001 633.2712508  
 98951400  
 Turbine Inlet Temp., TS (R)= 2260.00  
 Turbine Exit Temp., T6D(R)= 1508.62  
 Temp. drop across Turbine, DT= 751.38  
 HP TURBINE= 624.28  
 HPCOMP = 199.735

33

TOTAL MASS FLOW RATE (lb/s) = 1.5077  
NET HP (open cycle) = 424.54  
sfc (open cycle) = .560  
eff(open cycle= .234  
T7= 674.84  
T7D= 689.51  
DT COMP. 2 = 97.81  
HP COMP. 2 = 48.00  
HP water pump = .017  
NET HP (closed cycle) = 376.53  
sfc (closed cycle) = .631  
eff2 (closed cycle) = .208  
composition of exhaust by volume  
% of CO2= 10.8  
% of H2O= 25.8  
% of N2 = 63.4

VAST CYCLE OPERATED AT PRESSURE RATIO OF 22:1

f/a ratio = .066

Pressure Ratio = 22.000

Number of Compression Stages= 3

Inlet Water Temperature=672.000

Turbine Exit Pressure= 1.000

1 lb/s of air with Turbine Inlet Temp. (R)= 2260.000

gamma compr. 1= 1.394809521089263 608.043650004366800

gamma compr. 2= 1.392157497682254 849.596261682560700

gamma compr. 3= 1.369677999652017 1177.990796008891000

CPGAS in the burner= 3.101676106439402E-001 1829.089319  
349098000

Comp. Inlet Temp, T1= 520.00

1 st Stage Outlet Temp, T2d (R)= 727.16

2 nd Stage Outlet Temp, T3d (R)= 1015.24

3 rd Stage Outlet Temp, T4d (R)= 1398.18

Mass Flow Rate of Water (lb/s), = .505

gamma in turbine= 1.278767591503703 1706.015578042335000

cpmix in the turbine= 3.906654117917358E-001 1706.015578  
042335000

partial press. of steam (atm)= 6.361387976418345

partial press. of air (atm)= 8.338611832846791

SAT. TEMP. AT TURBINE OUTLET (R)= 593.171968080811400

gamma in sec. comp = 1.344309728848165 639.522982616262  
100cpmix in SEC. COMP = 3.316760835964486E-001 639.5229826  
16262100

Turbine Inlet Temp., T5 (R)= 2260.00

Turbine Exit Temp., T6D(R)= 1318.23

Temp. drop across Turbine, DT= 941.77

HP TURBINE= 817.80

HPCOMP = 308.108

TOTAL MASS FLOW RATE (lb/s) = 1.5708



35

NET HP (open cycle) = 509.69

sfc (open cycle) = .466

eff(open cycle)= .281

T7= 685.87

T7D= 702.23

DT COMP. 2 = 109.06

HP COMP. 2 = 54.57

HP water pump = .018

NET HP (closed cycle) = 455.11

sfc (closed cycle) = .522

eff2 (closed cycle) = .251

composition of exhaust by volume

% of CO2= 10.8

% of H2O= 25.8

% of N2 = 63.4

VAST CYCLE OPERATED AT PRESSURE RATIO OF 30:1

f/a ratio = .066  
 Pressure Ratio = 30.000  
 Number of Compression Stages= 3  
 Inlet Water Temperature=672.000  
 Turbine Exit Pressure= 1.000  
 1 lb/s of air with Turbine Inlet Temp. (R)= 2260.000  
 gamma compr. 1= 1.394694290256902 618.355140835066100  
 gamma compr. 2= 1.389029752150665 891.837744705560000  
 gamma compr. 3= 1.366209070734794 1273.898681933465000  
 CPGAS in the burner= 3.124320900049776E-001 1896.892037  
 142618000  
 Comp. Inlet Temp, T1= 520.00  
 1 st Stage Outlet Temp, T2d (R)= 751.42  
 2 nd Stage Outlet Temp, T3d (R)= 1081.81  
 3 rd Stage Outlet Temp, T4d (R)= 1533.78  
 Mass Flow Rate of Water (lb/s), = .534  
 gamma in turbine= 1.280208955027821 1666.747232151006000  
 cpmix in the turbine= 3.916002625082443E-001 1666.747232  
 151006000  
 partial press. of steam (atm)= 6.562762207406494  
 partial press. of air (atm)= 8.137237601858644  
 SAT. TEMP. AT TURBINE OUTLET (R)= 593.793812111702800  
 gamma in sec. comp = 1.343572354850198 642.266214292339  
 600  
 cpmix in SEC. COMP = 3.344248062769462E-001 642.2662142  
 92339600  
 Turbine Inlet Temp., T5 (R)= 2260.00  
 Turbine Exit Temp., T6D(R)= 1251.47  
 Temp. drop across Turbine, DT= 1008.53  
 HP TURBINE= 894.00  
 HPCOMP = 358.471  
 TOTAL MASS FLOW RATE (lb/s) = 1.5996

37

NET HP (open cycle) = 535.53  
sfc (open cycle) = .444  
eff(open cycle= .296  
T7= 690.74  
T7D= 707.85  
DT COMP. 2 = 114.05  
HP COMP. 2 = 57.54  
HP water pump = .019  
NET HP (closed cycle) = 477.97  
sfc (closed cycle) = .497  
eff2 (closed cycle) = .264  
composition of exhaust by volume  
% of CO2= 10.8  
% of H2O= 25.8  
% of N2 = 63.4

VAST CYCLE OPERATED AT PRESSURE RATIO OF 40:1

f/a ratio = .066

Pressure Ratio = 40.000

Number of Compression Stages= 3

Inlet Water Temperature=672.000

Turbine Exit Pressure= 1.000

1 lb/s of air with Turbine Inlet Temp. (R)= 2260.000

gamma compr. 1= 1.394584582122682 628.187703506602900

gamma compr. 2= 1.385229573509871 932.452934382434300

gamma compr. 3= 1.360860939314250 1366.979659174880000

CPGAS in the burner= 3.145343519546454E-001 1962.926186  
235099000

Comp. Inlet Temp, T1= 520.00

1 st Stage Outlet Temp, T2d (R)= 774.56

2 nd Stage Outlet Temp, T3D (R)= 1146.07

3 rd Stage Outlet Temp, T4d (R)= 1665.85

Mass Flow Rate of Water (lb/s), = .562

gamma in turbine= 1.281335192214647 1632.717036740625000

cpmix in the turbine= 3.925796903477528E-001 1632.717036  
740625000

partial press. of steam (atm)= 6.750831994487843

partial press. of air {atm}= 7.949167814777294

SAT. TEMP. AT TURBINE OUTLET (R)= 594.374571993012600

gamma in sec. comp = 1.342884542206362 644.886243238150  
400cpmix in SEC. COMP = 3.370260274627372E-001 644.8862432  
38150400

Turbine Inlet Temp., T5 (R)= 2260.00

Turbine Exit Temp., T6D(R)= 1193.62

Temp. drop across Turbine, DT= 1066.38

HP TURBINE= 964.40

HPCOMP = 408.011

TOTAL MASS FLOW RATE (lb/s) = 1.6279

39

NET HP (open cycle) = 556.38  
sfc (open cycle) = .427  
eff(open cycle= .307  
T7= 695.40  
T7D= 713.23  
DT COMP. 2 = 118.85  
HP COMP. 2 = 60.42  
HP water pump = .019  
NET HP (closed cycle) = 495.94  
sfc (closed cycle) = .479  
eff2 (closed cycle) = .274  
composition of exhaust by volume  
% of CO2= 10.8  
% of H2O= 25.8  
% of N2 = 63.4

VAST CYCLE OPERATED AT PRESSURE RATIO OF 50:1

f/a ratio = .066  
 Pressure Ratio = 50.000  
 Number of Compression Stages= 3  
 Inlet Water Temperature=672.000.  
 Turbine Exit Pressure= 1.000  
 1 lb/s of air with Turbine Inlet Temp. (R)= 2260.000  
 gamma compr. 1= 1.394497572254039 635.996556562169400  
 gamma compr. 2= 1.382215305172556 965.068507644903400  
 gamma compr. 3= 1.356615282102378 1442.860640297455000  
 CPGAS in the burner= 3.162590285087881E-001 2017.100000  
 649888000  
 Comp. Inlet Temp, T1= 520.00  
 1 st Stage Outlet Temp, T2d (R)= 792.93  
 2 nd Stage Outlet Temp, T3d (R)= 1197.96  
 3 rd Stage Outlet Temp, T4d (R)= 1774.20  
 Mass Flow Rate of Water (lb/s), = .585  
 gamma in turbine= 1.282120028863920 1607.786622664966000  
 cpmix in the turbine= 3.934720408020952E-001 1607.786622  
 664966000  
 partial press. of steam (atm)= 6.900293693691603  
 partial press. of air (atm)= 7.799706115573533  
 SAT. TEMP. AT TURBINE OUTLET (R)= 594.836110021193700  
 gamma in sec. comp = 1.342338420102895 647.010415983017  
 100  
 cpmix in SEC. COMP = 3.391172383199348E-001 647.0104159  
 83017100  
 Turbine Inlet Temp., TS (R)= 2260.00  
 Turbine Exit Temp., T6D(R)= 1151.24  
 Temp. drop across Turbine, DT= 1108.76  
 HP TURBINE= 1019.48  
 HPCOMP = 449.150  
 TOTAL MASS FLOW RATE (lb/s) = 1.6514

41.

NET HP (open cycle) = 570.33  
 sfc (open cycle) = .417  
 eff(open cycle= .315  
 T7= 699.18  
 T7D= 717.60  
 DT COMP. 2 = 122.76  
 HP COMP. 2 = 62.80  
 HP water pump = .020  
 NET HP (closed cycle) = 507.51  
 sfc (closed cycle) = .468  
 eff2 (closed cycle) = .280  
 composition of exhaust by volume  
 % of CO2= 10.8  
 % of H2O= 25.8  
 % of N2 = 63.4

TEXT OF COMPUTER PROGRAM USED FOR SIMULATING  
OPERATION OF ENGINE EMPLOYING PRESENT INVENTION

```

IMPLICIT REAL*8(A-H,O--Z)
DIMENSION PAIR(17),TT(17),VAIR(17),vn2(17),pn2(17),
      * pco2(17),vco2(17),ph20(17),vh20(17)
open(unit=11,file='1')
open(unit=22,file='2')
open(unit=33,file='3')
open(unit=44,file='4')
open(unit=1,file='a1')
DO 5 I=1,17
READ(11,*)TT(I),PAIR(I),VAIR(I)
read(22,*)tt(i),pn2(i),vn2(i)
read(33,*)tt(i),ph20(i),vh20(i)
read(44,*)tt(i),pco2(i),vco2(i)
TT(I)=TT(I)+460.0
5          CONTINUE
  
```



42

```

FA=0.066
READ(*,*)PR
ns=3
write(*,*)'turbine exit pressure=?'
read(*,*)pt
twater=212.d0+460.d0
tit=2260.0d0
write(1,555) fa, pr, ns ,twater, pt ,tit
555          format(5x,'f/a ratio =', 3x,f7.3,/, Sx,
'Pressure Ratio =',3x,
      *      f7.3, /, Sx, 'Number of Compression Stages=',
i4,/
      *      , Sx, ' Inlet Water Temperature=', f7.3,/,
      *      Sx, ' Turbine Exit Pressure=', f7.3,/
      *      ,Sx, ' 1 lb/s of air with Turbine Inlet Temp.
(R)= ', f8.3
      *      ,/,/,/)
T1=520.DO
PRS=(PR)**(1.DO/FLOAT(NS))
COMPRESSOR 1
GA=1.4
DO 10 I=1,10
WRITE(*,*)'gamma compr. 1=', ga,tav
T2=T1*(PRS)**((GA-1.0)/GA)
TAV=(T1+T2)/2.DO
GA=CpAIR(TAV,pair,vair,tt)/CVAIR(TAV,pair,vair,tt)
ga=1.406
10          CONTINUE
WRITE(1,*)'gamma compr. 1=', ga,tav
T2D=T1+(T2-T1)/0.85
HPC1=1.0*(T2D-T1)*CpAIR(TAV,PAIR,VAIR,TT)*778.3/550.0
COMPRESSOR 2
GA=1.4

```

43

```
DO 20 I=1,10
T3=T2D*(PRS)**((GA-1.0)/GA)
TAV=(T3+T2D)/2.DO
GA=CpAIR(TAV,pair,vair,tt)/CVAIR(TAV,pair,vair,tt)
cga=1.406
20      CONTINUE
write(1,*)'gamma compr. 2=', ga,tav
T3D=T2d+(T3-T2D)/0.85
HPC2=1.0*(T3D-T2D)*CpAIR(TAV,PAIR,VAIR,TT)*778.3/550.0
HPC=HPC1+HPC2
C      COMPRESSOR 3
GA=1.4
DO 25 I=1,10
T4=T3D*(PRS)**((GA-1.0)/GA)
TAV=(T4+T3D)/2.DO
GA=CpAIR(TAV,pair,vair,tt)/CVAIR(TAV,pair,vair,tt)
c      ga=1.406
25      CONTINUE
write(1,*)'gamma compr. 3=', ga,tav
T4D=T3d+(T4-T3D)/0.85
HPC3=1.0*(T4D-T3D)*CpAIR(TAV,PAIR,VAIR,TT)*778.3/550.0
HPC=HPC1+HPC2+hpc3
BURNER
tav=(t4d+2260.d0)/2.0
TBURN=FA/0.066*3600.DO+T4D
a1=CpCo2(tav,pco2,vco2,tt)
a2=cpn2(tav,pn2,vn2,tt)
a3=cph20(tav,ph20,vh20,tt)
write(*,*)tav,cpgas,a1,a2,a3
cpgas=(352.0*a1+162.0*a3+1263.36*a2)/1777.36
WRITE(1,*)'CPGAS in the burner=', cpgas,tav
WRITE(*,*)CPGAS
```

44

```

AMW=(TBURN-460.DO-1800.DO)*(1.DO+FA)*cpgas/(1973.6-180.0)
amt=1.do+amw+fa
WRITE(1,100)T1,T2D,T3D,t4d,amw
FORMAT('Comp. Inlet Temp, T1=',5X,F7.2,/,
      '1 st Stage Outlet Temp, T2d (R)=',5X,F7.2,/,
      '2 nd Stage Outlet Temp, T3D (R)=',5X,F7.2,
/, '3 rd Stage Outlet Temp, T4d (R)=',5X,F7.2,/,
      'Mass Flow Rate of Water (lb/s), =',5X,f7.3,/)
turbine
t5=2260.DO
GA=1.4
DO 30 I=1,10
T6=T5*(pt/PR)**((GA-1.0)/GA)
TAV=(T5+T6)/2.DO
a1=cpcO2(tav,pco2,vco2,tt)
a2=cpn2(tav,pn2,vn2,tt)
a3=cph2O(tav,ph20,vh20,tt)
cpgas=(352.0*a1+162.0*a3+1263.36*a2)/1777.36
CpMIX=(AMW*A3+(1.DO+FA)*CPGAS)/(AMT)
c      WRITE(*,*)'CPMIX=',CPMIX
a1=cVco2(tav,pco2,vco2,tt)
a2=cVn2(tav,pn2,vn2,tt)
a3=cVh2O(tav,ph20,vh20,tt)
cVgas=(352.0*a1+162.0*a3+1263.36*a2)/1777.36
CVMIX=(AMW*A3+(1.DO+FA)*CVGAS)/(AMT)

GA=CPMIX/CVMIX
CONTINUE
write(1,*)'gamma in turbine=', ga,tav
write(1,*)'cpmix in the turbine=', cpmix,tav
T6D=TS+(T6-T5)*0.85
DTT=TS-T6D
HPT=AMT*DTT*778.3/550.0*Cpmix

```

45

```

      HPN1=HPT-HPC
      SFCL=FA*3600.DO/HPN1
      EFF1=HPN1*550.DO/778.3/(3600.0*0.328+180.DO*0.55)
      go to 1100
      SECONDARY COMPRESSOR
      PP=pt*14.7*(AMW/18.0)/(AMW/18.0+(1.DO+FA)/29.0)
      pa=pt*14.7-pp
      write(1,*)'partial press. of steam (atm)=' , pp
      write(1,*)'partial press. of air (atm)=' , pa
      HPpump=amw*(1.dos-pp/14.7*1.dos)/1.dos*1.04/2.2/746
      SAT=TSAT(PP)+460.0
      write ( 1, * ) ' SAT . TEMP . AT TURBINE OUTLET
(R) = ' , SAT
      GA=1.4
      DO 70 I=1,10
      T7=sat*(14.7/Pa)**((GA-1)/GA)
      TAV=(T7+sat)/2.DO
      write(*,*)'gamma in sec. comp =' , ga,tav
      write ( *, * ) ' cpmix in SEC . COMP = ' , cpmix,
tav
      write(*,*)'t6,sat=' , t7,sat
      a1=cpc2(tav,pc2,vco2,tt)
      a2=cpc2(tav,pn2,vn2,tt)
      a3=cph20(tav,ph2c,vh20,tt)
      cpgas=(352.0*a1+162.0*a3+1263.36*a2)/1777.36
      CPMIX=(AMW*A3+(1.DO+FA)*CPGAS)/(AMT)
      WRITE ( *, * ) ' CPMIX= ' , CPMIX
      a1=cVco2(tav,pc2,vco2,tt)
      a2=cVn2(tav,pn2,vn2,tt)
      a3=cVh20(tav,ph20,vh20,tt)
      cVgas=(352.0*a1+162.0*a3+1263.36*a2)/1777.36
      CVMIX=(AMW*A3+(1.DO+FA)*CVGAS)/(AMT)
      GA=CPMIX/CVMIX

```

46

70 CONTINUE

write(1,\*)'gamma in sec. comp =' , ga,tav

write(1,\*)'cpmix in SEC. COMP =' , cpmix,tav

T7D=(T7-sat)/0.85+sat

DTT1=t7d-sat

HPS=(1.d0+fa)\*DTT1\*778.3/550.0\*CpMIX

HPN2=HPT-HPC-HPS-hppump

SFC2=FA\*3600.D0/HPN2

EFF2=HPN2\*550.D0/778.3/(3600.0\*0.328+180.D0\*0.55)

write(1,\*)

write(1,\*)

1 1 0 0

WRITE(1,200)T5,T6D,DTT,HPT,HPC,AMT,HPN1,SFC1,eff1

200 FORMAT('Turbine Inlet Temp., T5

(R)=' ,SX,F7.2,,/ ,

\* 'Turbine Exit Temp., T6D(R)=' ,5X,F7.2,

\* / , 'Temp. drop across Turbine, DT=' ,5X,F7.2,,/ ,

\* 'HP TURBINE=' ,5X,F7.2,,/ , 'HPCOMP

\* = ' ,5X,f7.3,,/ , 'TOTAL MASS FLOW RATE (lb/s)

= ' ,5X,F6.4,,/ ,

\* 'NET HP (open cycle) = ' ,5X,F7.2,/

\* , ' sfc (open cycle) = ' , 5X, F7.3,,/ ,

\* 'eff(open cycle=' ,5X,f7.3,,/ ,/ ,)

WRITE(1,400)T7,T7D,DTT1,HPS,hppump,HPN2,SFC2,eff2

400 FORMAT('T7=' ,5X,F7.2,,/ , 'T7D=' ,5X,F7.2,

\* / , 'DT COMP. 2 = ' ,5X,F7.2,,/ , 'HP COMP. 2

= ' ,5X,F7.2,,/ ,

\* ' HP water pump = ' , f7.3,/

\* , 'NET HP (closed cycle) = ' ,5X,F7.2,/

\* , ' sfc (closed cycle) = ' , 5X, F7.3,,/ ,

\* 'eff2 (closed cycle) = ' ,5X,f7.3,,/ ,/ ,/ ,)

write(1,\*)'composition of exhaust by volume'

write(1,\*)' ~

47

```
Write(1,*)'% of CO2= 10.8'
Write(1,*)'% of H2O= 25.8'
Write(1,*)'% of N2 = 63.4'
STOP
END
alr
FUNCTION CPAIR(TAV,pair,vair,tt)
IMPLICIT REAL*8(A-H,O-Z)
DIMENSION PAIR(17),TT(17),VAIR(17)
COMMON PAIR,TT,VAIR,vn2,cn2,vh20,ph20,vco2,pco2
DO 10 I=1,16
IF(TAV.LE.TT(I+1).AND.TAV.GE.TT(I)) THEN

CPAIR=PAIR(I)+(TAV-TT(I))*(PAIR(I+1)-PAIR(I))/(TT(I+1)-T
T(I))
GO TO 999
ENDIF
10      CONTINUE
999      S=CPAIR
RETURN
END
FUNCTION CVAIR(TAV,pair,vair,tt)
IMPLICIT REAL*8(A-H,O-Z)
DIMENSION PAIR(17),TT(17),VAIR(17)
C      COMMON PAIR,TT,VAIR,vn2,cn2,vh20,ph20,vco2,pco2
DO 10 I=1,16
IF(TAV.LE.TT(I+1).AND.TAV.GE.TT(I)) THEN
CVAIR=VAIR(I)+(TAV-TT(I))*(VAIR(I+1)-VAIR(I))/(TT(I+1)-T
T(I))
GO TO 999
ENDIF
10      CONTINUE
999      S=CPAIR
```

48

RETURN

END

FUNCTION CPn2(TAV,pn2,vn2,tt)

IMPLICIT REAL\*8(A-H,O-Z)

DIMENSION Pn2(17),TT(17),Vn2(17)

C COMMON PAIR,TT,VAIR,vn2,cn2,vh20,ph20,vco2,pco2

DO 10 I=1,16

IF(TAV.LE.TT(I+1).AND.TAV.GE.TT(I)) THEN

CPn2=Pn2(I)+(TAV-TT(I))\*(Pn2(I+1)-Pn2(I))/(TT(I+1)-TT(I))

GO TO 999

ENDIF

10 CONTINUE

999 S=CPn2

RETURN

END

FUNCTION CVn2(TAV,pn2,vn2,tt)

IMPLICIT REAL\*8(A-H,O-Z)

DIMENSION Pn2(17),TT(17),Vn2(17)

C COMMON PAIR,TT,VAIR,vn2,cn2,vh20,ph20,vco2,pco2

DO 10 I=1,16

IF(TAV.LE.TT(I+1).AND.TAV.GE.TT(I)) THEN

CVn2=Vn2(I)+(TAV-TT(I))\*(Vn2(I+1)-Vn2(I))/(TT(I+1)-TT(I))

GO TO 999

ENDIF

10 CONTINUE

999 S=CVn2

return

END

h20

FUNCTION CPh20(TAV,ph20,vh20,tt)

IMPLICIT REAL\*8(A-H,O-Z)

DIMENSION Ph20(17),TT(17),Vh20(17)



49

```

C      COMMON PAIR, TT, VAIR, vn2, cn2, vh20, ph20, vco2, pco2
DO 10 I=1,16
IF(TAV.LE.TT(I+1).AND.TAV.GE.TT(I)) THEN
CPh20=Ph20(I)+(TAV-TT(I))*(Ph20(I+1)-Ph20(I))/(TT(I+1)-T
T(I))
GO TO 999
ENDIF
10      CONTINUE
999      S=CPh20
RETURN
END

FUNCTION CVh20(TAV, ph20, vh20, tt)
IMPLICIT REAL*8(A-H, O-Z)
DIMENSION Ph20(17), TT(17), Vh20(17)
C      COMMON PAIR, TT, VAIR, vn2, cn2, vh20, ph20, vco2, pco2
DO 10 I=1,16
IF(TAV.LE.TT(I+1).AND.TAV.GE.TT(I)) THEN
CVh20=Vh20(I)+(TAV-TT(I))*(Vh20(I+1)-Vh20(I))/(TT(I+1)-T
T(I))
GO TO 999
ENDIF
10      CONTINUE
999      S=CVh20
RETURN
END

co2
FUNCTION CPco2(TAV, pco2, vco2, tt)
IMPLICIT REAL*8(A-H, O-Z)
DIMENSION Pco2(17), TT(17), Vco2(17)
C      COMMON PAIR, TT, VAIR, vn2, cn2, vh20, ph20, vco2, pco2
DO 10 I=1,16
IF(TAV.LE.TT(I+1).AND.TAV.GE.TT(I)) THEN

```

50

```

CPco2=Pco2(I)+(TAV-TT(I))*(Pco2(I+1)-Pco2(I))/(TT(I+1)-T
T(I))

```

```

GO TO 999

```

```

ENDIF

```

```

10      CONTINUE

```

```

999      S=CPco2

```

```

RETURN

```

```

END

```

```

FUNCTION CVco2(TAV,pco2,vco2,tt)

```

```

IMPLICIT REAL*8(A-H,O-Z)

```

```

DIMENSION Pco2(17),TT(17),Vco2(17)

```

```

C      COMMON PAIR,TT,VAIR,vn2,cn2,vh20,ph20,vco2,pco2

```

```

DO 10 I=1,16

```

```

IF(TAV.LE.TT(I+1).AND.TAV.GE.TT(I)) THEN

```

```

CVco2=Vco2(I)+(TAV-TT(I))*(Vco2(I+1)-Vco2(I))/(TT(I+1)-T
T(I))

```

```

GO TO 999

```

```

ENDIF

```

```

10      CONTINUE

```

```

999      S=CVco2

```

```

RETURN

```

```

END

```

```

C      STEAM TABLES

```

```

FUNCTION TSAT(PP)

```

```

IMPLICIT REAL*8(A-H,O-Z)

```

```

DIMENSION X(22),Y(22)

```

```

DO 10 I=1,22

```

```

X(I)=FLOAT(I)*I

```

```

10      CONTINUE

```

```

Y(1) =101 . 64

```

```

Y(2)=125.88

```

```

Y(3)=141.32

```

```

Y(4)=152.81

```

51

```
Y(5)=162.09
Y(6)=170.02
Y(7)=176.8
Y(8)=182.77
Y(9)=188.2
Y(10)=193.17
Y(11)=197.73
Y(12)=201.92
Y(13)=205.74
Y(14)=209.46
Y(15)=212.94
Y(16)=216.09
Y(17)=219.23
Y(18)=222.37
Y(19)=225.11
Y(20)=227.78
Y(21)=230.45
Y(22)=233.05
DO 20 I=1,21
IF (PP.LE.x(I+1).AND.PP.GE.x(I)) THEN
TSAT=y(I)+(PP-x(I))*(Y(I+1)-Y(I))/(x(I+1)-x(I))
GO TO 999
ENDIF
20      CONTINUE
999      S=TSAT
RETURN
END
```

E. Conclusion

5 While various embodiments of the present invention have been shown for illustrative purposes, the scope of protection of the present invention is limited only in accordance with the following claims and the spirit and scope of the appended claims should not be limited to the description of the preferred versions contained herein.

What is claimed is:

1. An internal combustion engine comprising:

5 a compressor configured for compressing ambient air into compressed air having a pressure greater than at least four atmospheres and an elevated temperature;

10 a combustion chamber connected to the compressor, wherein the combustor is configured to duct a progressive flow of compressed air from the compressor;

fuel injection means for injecting fuel into the combustion chamber;

fluid injection means for injecting fluid into the combustion chamber;

15 a combustion controller for independently controlling the compressed air, the fuel injection means, and fluid injection means so the injected fuel and at least a portion of the compressed air is combusted and the injected fluid is transformed into  
20 a vapor such that a working fluid consisting of a mixture of compressed air, fuel combustion products and vapor is generated in the combustion chamber during combustion at a predetermined combustion temperature; and

25 a work engine coupled to and supplied with the working fluid formed in the combustion chamber.

2. The engine according to claim 1 further including an ignition sparker for starting up the engine by igniting the injected fuel and compressed air.

30 3. The engine according to claim 1, wherein the engine works on an open cycle, and further includes condenser means for condensing a desired portion of the vapor from the working fluid and exhaust means for exhausting the remaining portion of the working fluid.

4. The engine according to claim 1, wherein the engine works on a closed cycle, and further includes condenser means for condensing the vapor from the working fluid and exhaust means for exhausting the remainder of the working fluid to the compressor.

5. The engine according to claim 1 further including one or more additional combustion chambers receiving compressed air from one or more compressors such that working fluid is delivered to one or more work engines.

6. The engine according to claim 1 wherein the work engine receiving the work fluid is either a turbine, reciprocating, Wankel or cam engine.

7. The engine according of claim 1, wherein the compressor and work engines are turbine type devices, and wherein the turbines are connected by at least one shaft.

8. The engine according to claim 1, wherein the combustion controller controls the combustion temperature based on information transmitted from temperature detectors and thermostats located in the combustion chamber.

9. The engine according to claim 1, wherein the combustion control means controls the fluid injection means and fuel injection means during combustion such that the weight of injected fluid is approximately two or more times the weight of injected fuel so that the mass of the working fluid is increased in order to maintain the average temperature to a desired work engine operating temperature.

10. The engine according to claim 9, wherein the combustion control means controls the air flow and fuel injection means such that the ratio of weight of injected fuel to weight of injected air is approximately .03 to .066 during combustion.

11. The engine according to claim 10, wherein the combustion controller independently controls the average combustion temperature and the fuel to air ratio.

5 12. The engine according to claim 9, wherein the combustion temperature is reduced by the combustion control means so that stoichiometric burning and equilibrium is achieved in the working fluid.

10 13. The engine according to claim 9, wherein at least about 40% of the compressed air is combusted in the combustion chamber.

14. The engine according to claim 9, wherein the pressure of the compressed air is maintained at a pressure of 4 to 100 atmospheres, while entropy of the engine is held approximately constant.

15 15. The engine according to claim 1, wherein the pressure of the compressed air is maintained constant while the temperature of combustion and the quantity of working fluid is varied by the combustion controller.

20 16. The engine according to claim 1 wherein all chemical energy in the injected fuel is converted during combustion into thermal energy and the vaporization of water into steam creates cyclonic turbulence that assists molecular mixing of the fuel and air such that stoichiometric combustion is effectuated.

25 17. The engine according to claim 1 wherein the liquid injection means is a series of at least one nozzle located in the combustion chamber fed by a pressurized liquid supply.

30 18. The engine according to claim 1 wherein the liquid injected into the combustion chamber is water which is transformed into steam and the combustion products are cooled by way of the latent heat of vaporization of water.



19. The engine according to claim 18 wherein the injected water absorbs heat energy so that the temperature of the working fluid is reduced to that of a maximum operating temperature of the work engine.

5 20. The engine according to claim 18 wherein the injected water is transformed by way of a flash process into steam at the pressure of the combustion chamber without additional work for compression and without additional entropy.

10 21. The engine according to claim 18, wherein the engine is a steam turbine powered by the working fluid comprising about 25% steam, 65% unoxidized nitrogen and 10% carbon dioxide.

15 22. The engine according to claim 18, wherein the water injection is used to control the combustion temperature and the maximum operating temperature of the work engine and to prevent the formations of gases and compounds that cause or contribute to the formation of atmospheric smog.

20 23. The engine according to claim 1 wherein the fuel injection means comprises at least one nozzle located in the combustion chamber, said nozzle being fed by a pressurized fuel supply.

25 24. The engine according to claim 21 wherein the fuel supply includes ethanol, said ethanol including water which is used for cooling the working fluid.

30 25. The engine according to claim 1 wherein the injected fluid is seawater, and further including desalination means to remove salt from the seawater and collect such salt from the combustor.

26. The engine according to claim 24 further including a condenser for collecting potable water after the seawater has been treated by the desalination means.

27. The engine according to claim 1 wherein during the operation of the engine in excess of a predetermined rpm, water injection and the portion of compressed air combusted is constant with respect to fuel as engine rpm increases, and during the operation of the engine between the first and a second predetermined rpm the water/fuel ratio and the air/fuel ratio increases, and below the second predetermined rpm, water/fuel ratio and air/fuel ratio are held constant.

28. The engine according to claim 27, wherein the ratio of water weight to fuel weight injected ranges from approximately 8 to 1 to 1:1 as the rpm of the engine is increased.

29. A method of operating an internal combustion engine comprising the steps of:

compressing ambient air into compressed air having a pressure of at least four atmospheres, and having an elevated temperature;

ducting the flow of compressed air into a compressor;

injecting controlled amounts of fuel into the combustion chamber;

injecting controlled amounts of fluid into the combustion chamber;

independently controlling the amount of compressed air, the amount of fuel injected, and the amount of fluid injected so as to combust the injected fuel at least a portion of the compressed air and to transform the injected fluid into a vapor;

wherein a working fluid consisting of a mixture of compressed air, fuel combustion products and vapor is generated in the combustion chamber during combustion at a predetermined combustion temperature.

30. The method of claim 29 further including the step of igniting the engine at startup using an ignition sparker.

5 31. The method of claim 29, wherein the engine is operated on an open cycle, and further including the steps of condensing a desired portion of the vapor from the working fluid and exhausting the remaining portion of the working fluid.

10 32. The method of claim 29, wherein the engine is operated on a closed cycle, and further including the steps of condensing the vapor from the working fluid exhausting the remainder of the working fluid for recompression.

15 33. The method of claim 29 further including the step of delivering the working fluid to at least one work engine.

20 34. The method of claim 29, wherein combustion temperature is controlled based on information from temperature detectors and thermostats located in the combustion chamber.

25 35. The method of claim 29, wherein the amount of fluid and fuel injected is controlled during combustion such that the ratio of weight of injected fluid to weight of injected fuel is at least about two to one so that the mass of the working fluid is increased in order to maintain the average temperature to a desired work engine operating temperature.

30 36. The method of claim 35, wherein the air flow and fuel injection is controlled such that the ratio of weight of injected fuel to weight of injected air is approximately .03 to .066 during combustion.

37. The method of claim 36, wherein the average combustion temperature and the fuel to air ratio are independently controlled.

38. The method of claim 37, wherein the combustion temperature is reduced so that stoichiometric bonding and equilibrium is achieved in the working fluid.

5 39. The method of claim 35, wherein at least about 40% of the compressed air is combusted in the combustion chamber.

10 40. The method of claim 35, wherein the pressure of the compressed air is maintained at a pressure of 4 to 100 atmospheres, while entropy of the engine is held approximately constant.

41. The method of claim 29, wherein the pressure of the compressed air is maintained constant while the temperature of the combustion products and quantity working fluid is varied.

15 42. The method of claim 29 wherein all chemical energy in the injected fuel is converted during combustion into thermal energy and the vaporization of fluid creates cyclonic turbulence that assists molecular mixing of the fuel and air such that stoichiometric combustion is effectuated.

20 43. The method of claim 29 wherein the liquid injected into the combustion chamber is water which is transformed into steam and the combustion products are cooled by way of the latent heat of vaporization of such water.

25 44. The method of claim 43 wherein the injected water absorbs all the heat energy so as to reduce the temperature of the working fluid below that of a work engine maximum operating temperature.

30 45. The method of claim 43 wherein the injected water is transformed by way of a flash process into steam at a pressure of the combustion chamber without additional work for compression and without additional entropy or enthalpy.

46. The method of claim 43, wherein the working fluid is comprised of about 25% steam, 65% unoxidized nitrogen and 10% carbon dioxide.

5 47. The method of claim 43, wherein the water injection is used to control the combustion temperature and to prevent the formations of gases and compounds that cause or contribute to the formation of atmospheric smog.

10 48. The method of claim 29 wherein the injected fluid is sea water, and further including the steps of treating the sea water as to collect and remove the salt from sea water.

49. The method of claim 48 further including the step of condensing potable water after the seawater has been treated.

15 50. The method according to claim 29 wherein during the operation of the engine at greater than a predetermined rpm, water injection and the portion of compressed air combusted is constant with respect to fuel as engine rpm increases, and during the operation of the engine between the first and a second predetermined rpm, the water/fuel ratio and air/fuel ratio increases, and below the second predetermined rpm, the water/fuel ratio and air/fuel ratio are held constant.

25 51. The method of claim 43 wherein cooling of the engine is effectuated with water, and without dilution air.

30 52. A process of continuously delivering a working fluid to the exit of an engine combustion chamber, the working fluid having enhanced power generating capacity when compared with the working fluid produced by an engine operating only with a fuel and air feed, comprising:

35 a) creating a combustible mixture by continuously combining fuel under pressure and compressed air in the combustion chamber, the

61

air being fed in a fixed ratio to the fuel, the fixed ratio providing air in at least a stoichiometric quantity,

5 b) igniting the combustible mixture to create a continuously burning flame which produces a hot gas stream of combustion products having a pressure in excess of the pressure of the compressed air, and

10 c) injecting a vaporizable, inert liquid into the hot gas stream to reduce the temperature of the hot gas stream, the liquid having a temperature at or above about its boiling temperature when subjected to one atmosphere of pressure a temperature necessary to maintain the inert liquid in a liquid state when subjected to a pressure greater than one atmosphere and in excess of the pressure in the combustion chamber, the injected inert liquid flashing to vapor immediately upon  
20 entering the combustion chamber, the combination of the hot gas stream and vapor constituting the working fluid, the quantity of inert liquid and the temperature of the inert liquid being selected to produce a  
25 preset temperature in the working fluid at the exit of the combustion chamber,

the temperature and dwell time of the hot gas stream of combustion products being controlled to cause substantially full combustion of the fuel while the  
30 temperature of the working fluid is controlled to minimize formation of nitrogen oxides and maximize formation of carbon dioxide, the process continuing until the need for delivery of the working fluid ceases to exist.

53. The process of claim 52 wherein the quantity of compressed air entering the combustion chamber is slightly in excess of the stoichiometric amounts so that at least about 95% of the air is consumed in the burning of the combustible mixture.

54. The process of claim 52 wherein the temperature of the working fluid in the engine is controlled to a selected temperature between about 750° F. and about 2300° F by the injection of the liquid water.

55. The process of claim 52 wherein the temperature of the working fluid exiting the engine is controlled to a selected temperature between about 1800° F. and about 2200° F by the injection of the liquid water.

56. The process of claim 54 or 55 wherein the temperature of the inert liquid just prior to injection is at a temperature not more than about 50° F below that of the working fluid.

57. The process of claim 52 further including, after step c), directing the working fluid into a turbine power generator, the working fluid exiting the turbine being used to heat the inert liquid prior to injection into the working fluid.

58. The process of claim 57 wherein the fuel is diesel oil number 2, the f/a is 0.066, and for every 1 pound per second of air feed the turbine power generator produces in excess of 650 horsepower at a fuel efficiency in excess of about 36 percent and an sfc of less than about 0.36.

59. The process of claim 52 wherein the fuel is selected from the group consisting of diesel fuel number 2, ethanol and sulphur free heating oil.

60. The process of claim 57 wherein for every 1 pound per second of air feed the turbine power generator produces in excess of 800 horsepower at a fuel efficiency in excess of about 45 percent and an sfc of less than



about 0.30.

61. The process of claim 52 wherein the inert liquid is sea water and the process further includes the collection of molten salt in the combustion chamber and the conversion of the molten salt to a solid form.

62. The process of recovering salt and potable water from sea water, the salt being recovered in a preferred solid form comprising;

a) generating a flame in a combustion chamber by mixing and burning a carbon based fuel with a stoichiometric amount of air so that a hot gas stream of combustion products is created,

b) reducing the temperature of the hot gas stream by injecting sea water into the hot gas stream the reduced temperature of the hot gas stream being between the melting temperature and the boiling temperature of the salt in the sea water, the injection of the sea water causing the water to convert to steam upon entering the hot gas stream and the salt in the sea water to be deposited as a liquid in the combustion chamber,

c) removing the liquid salt from the combustion chamber through means designed to convert the liquid salt into a solid of a preferred shape and size, and

d) removing the steam and combustion products from the combustion chamber, passing the removed steam and combustion products through condensing means such that the steam is converted to water, separating the combustion products from the steam, and collecting the water so produced.

64

63. The process of claim 62 wherein the steam and combustion products are passed through a turbine power generator before being passed through the condensing means.

5           64. The process of claim 62 or 63 wherein substantially all of the carbon in the fuel is converted to carbon dioxide and substantially all of the nitrogen gas entering the combustion chamber in the air stream leaves the combustion chamber as nitrogen gas, the  
10           production of NO<sub>x</sub> from N<sub>2</sub> being substantially zero.

          65. The process of claim 63 wherein the steam and combustion products passing through the turbine power generator causes the generation of power in the excess of  
15           500 horsepower for each pound of air feed per second when the fuel to air ratio is in substantially stoichiometric amounts.

          66. The process of claim 73 wherein the steam and combustion products passing through the turbine power generator causes the generation of power in the excess of  
20           650 horsepower for each pound of air feed per second when the fuel to air ratio is in substantially stoichiometric amounts.

          67. The process of claim 63 wherein the steam and combustion products passing through the turbine power generator causes the generation of power in the excess of  
25           800 horsepower for each pound of air feed per second when the fuel to air ratio is in substantially stoichiometric amounts.

          68. An internal combustion engine comprising  
30           a) a combustion chamber,  
          b) a work engine coupled to the combustion chamber,  
          c) air supply means for delivering compressed  
          air at an elevated temperature and at a constant  
35           pressure proportional to work engine demand to the

combustion chamber,

d) fuel supply means for delivering fuel to the combustion chamber, the fuel and air being mixed in the combustion chamber,

5 e) control means to vary the quantity of air supplied to the combustion chamber and to adjust the amount of fuel supplied to the combustion chamber so that the fuel to air ratio remains constant,


10 f) a fuel igniter for igniting the fuel air mixture to produce a combustion vapor stream,

15 g) water supply means for delivering superheated water under pressure to the combustion chamber, the water being converted substantially instantaneously upon entering the combustion chamber to steam, the delivery and formation of steam creating turbulence and mixing in the combustion chamber resulting in a working fluid composed of steam, combustion vapor and unreacted air components.

20 h) a combustion chamber temperature controller, said controller delivering the superheated water to the combustion chamber in quantities sufficient to maintain the temperature of the working fluid,

25 i) heat exchanging means for transferring heat from the working fluid exiting the work engine to the water, said heat elevating the temperature of the water from a feed temperature to the desired temperature for delivery to the combustion chamber.

Figure 1

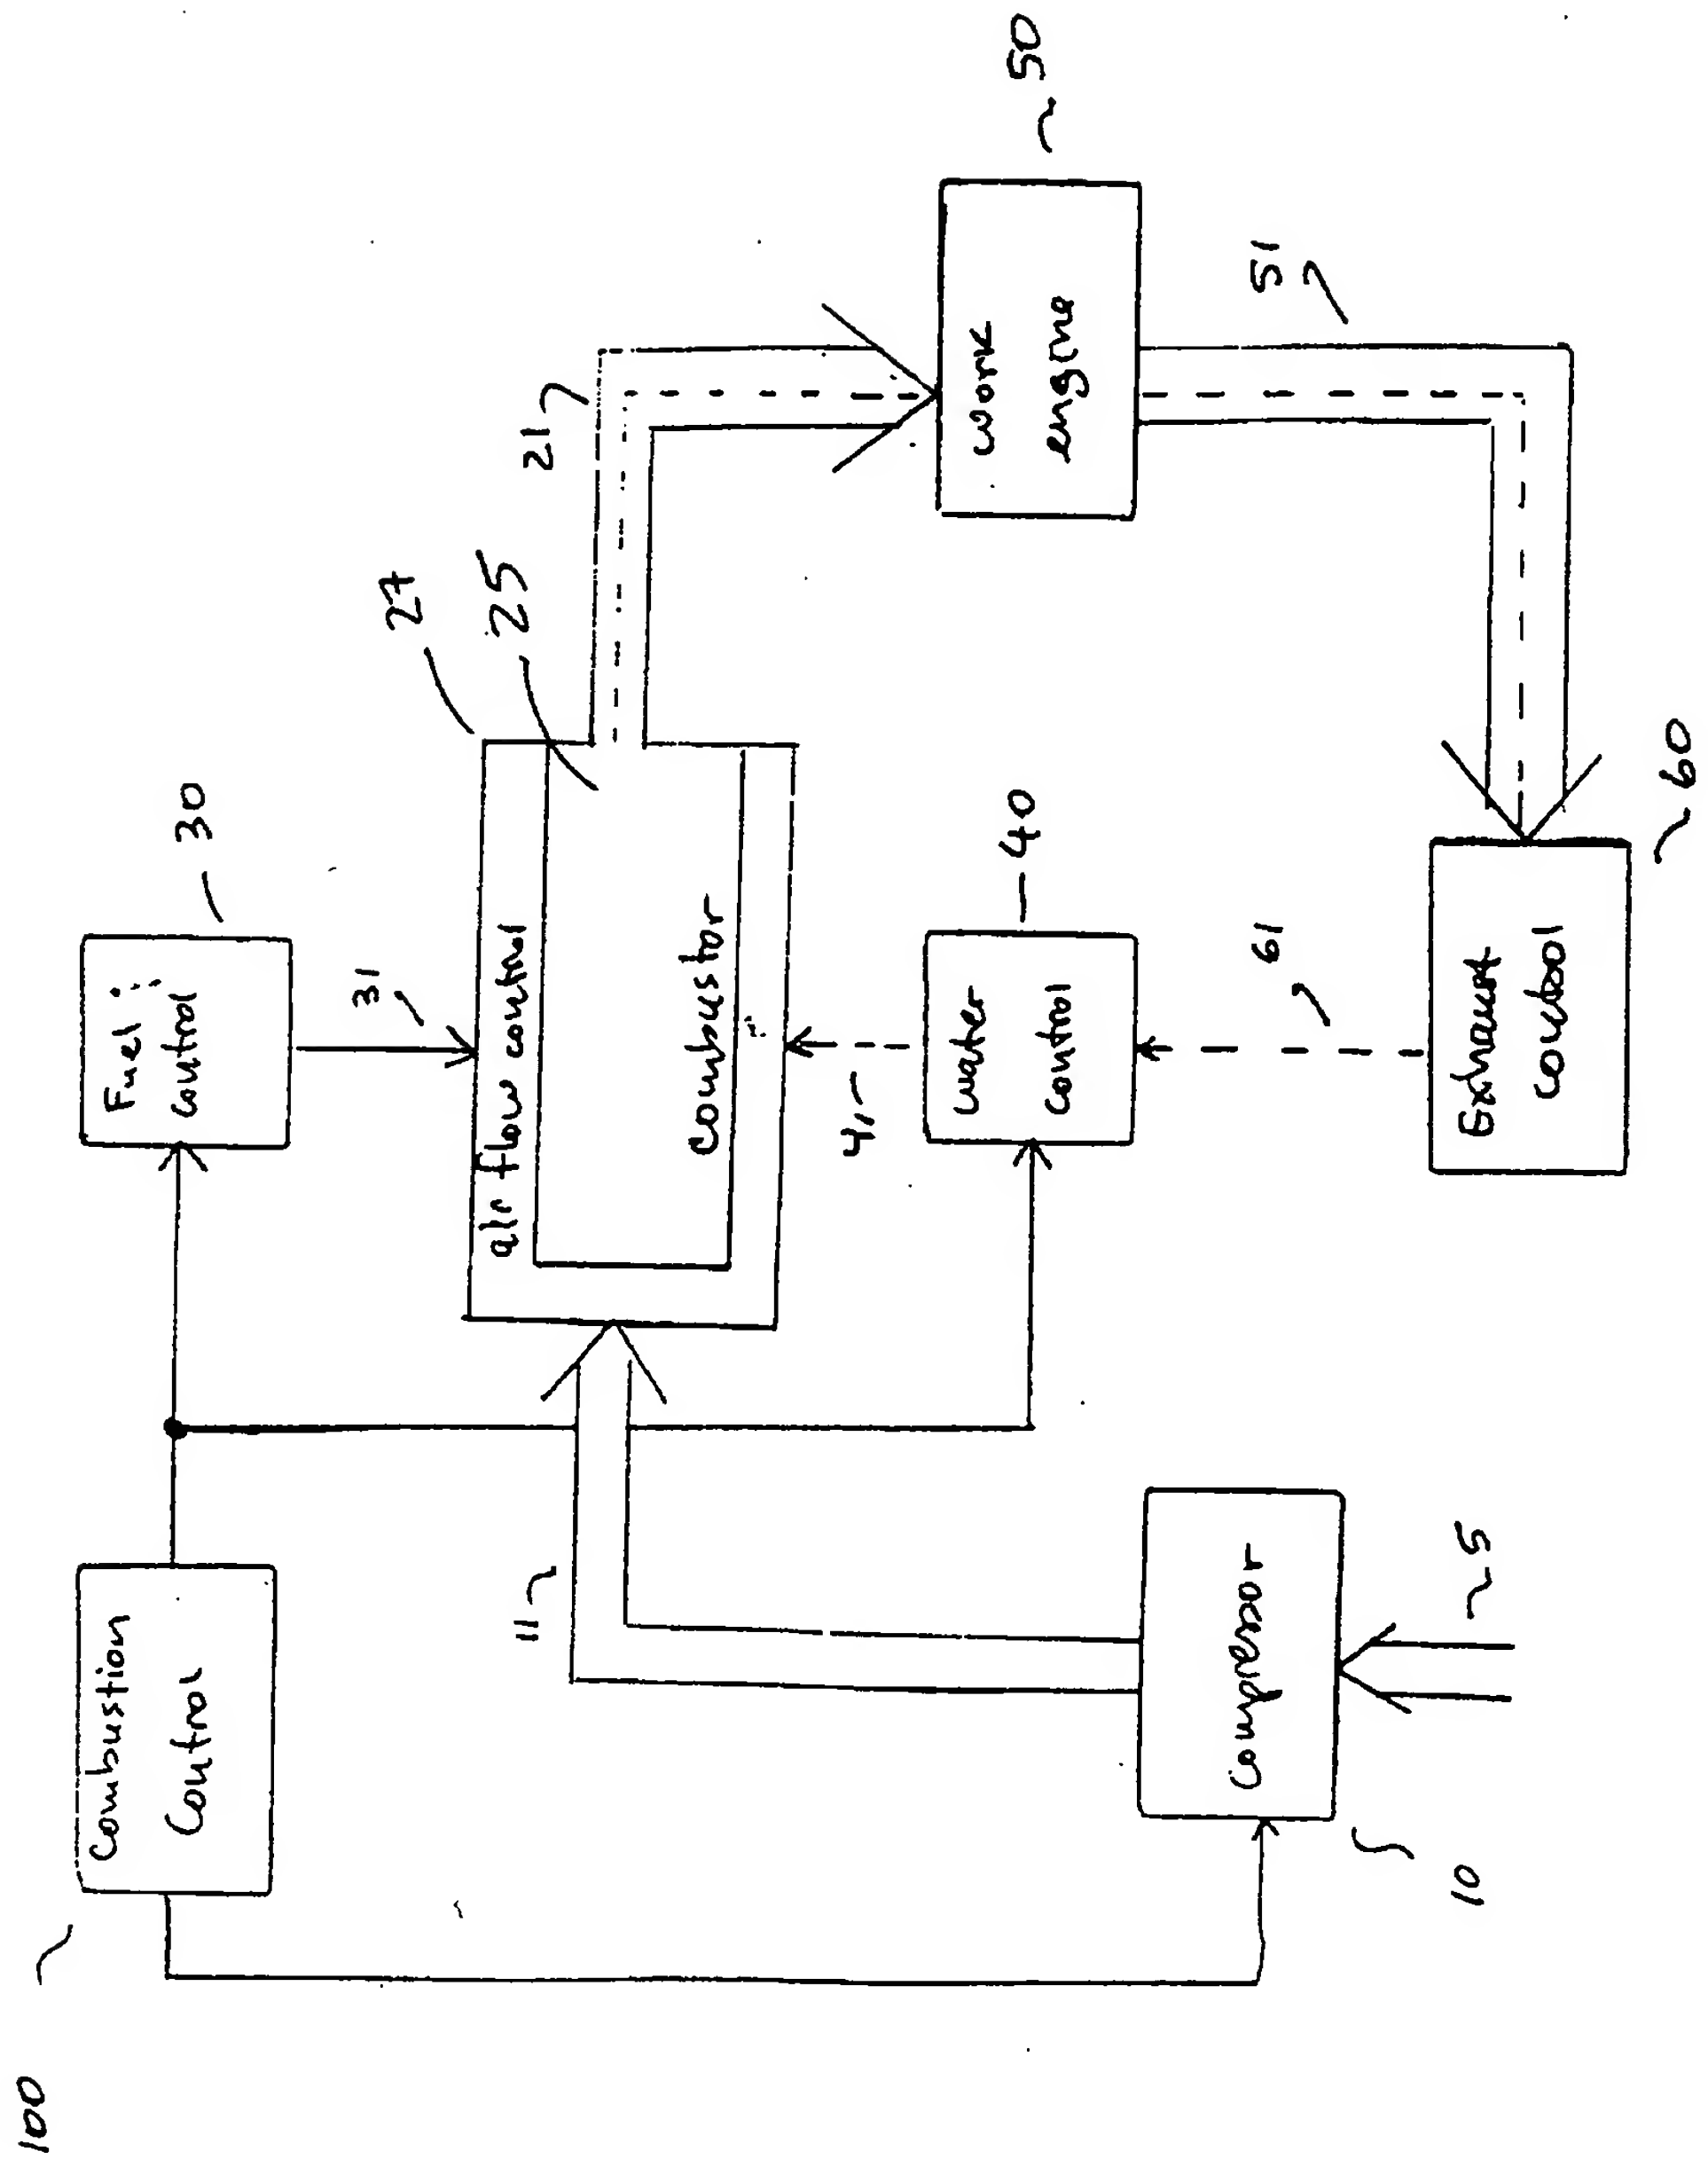

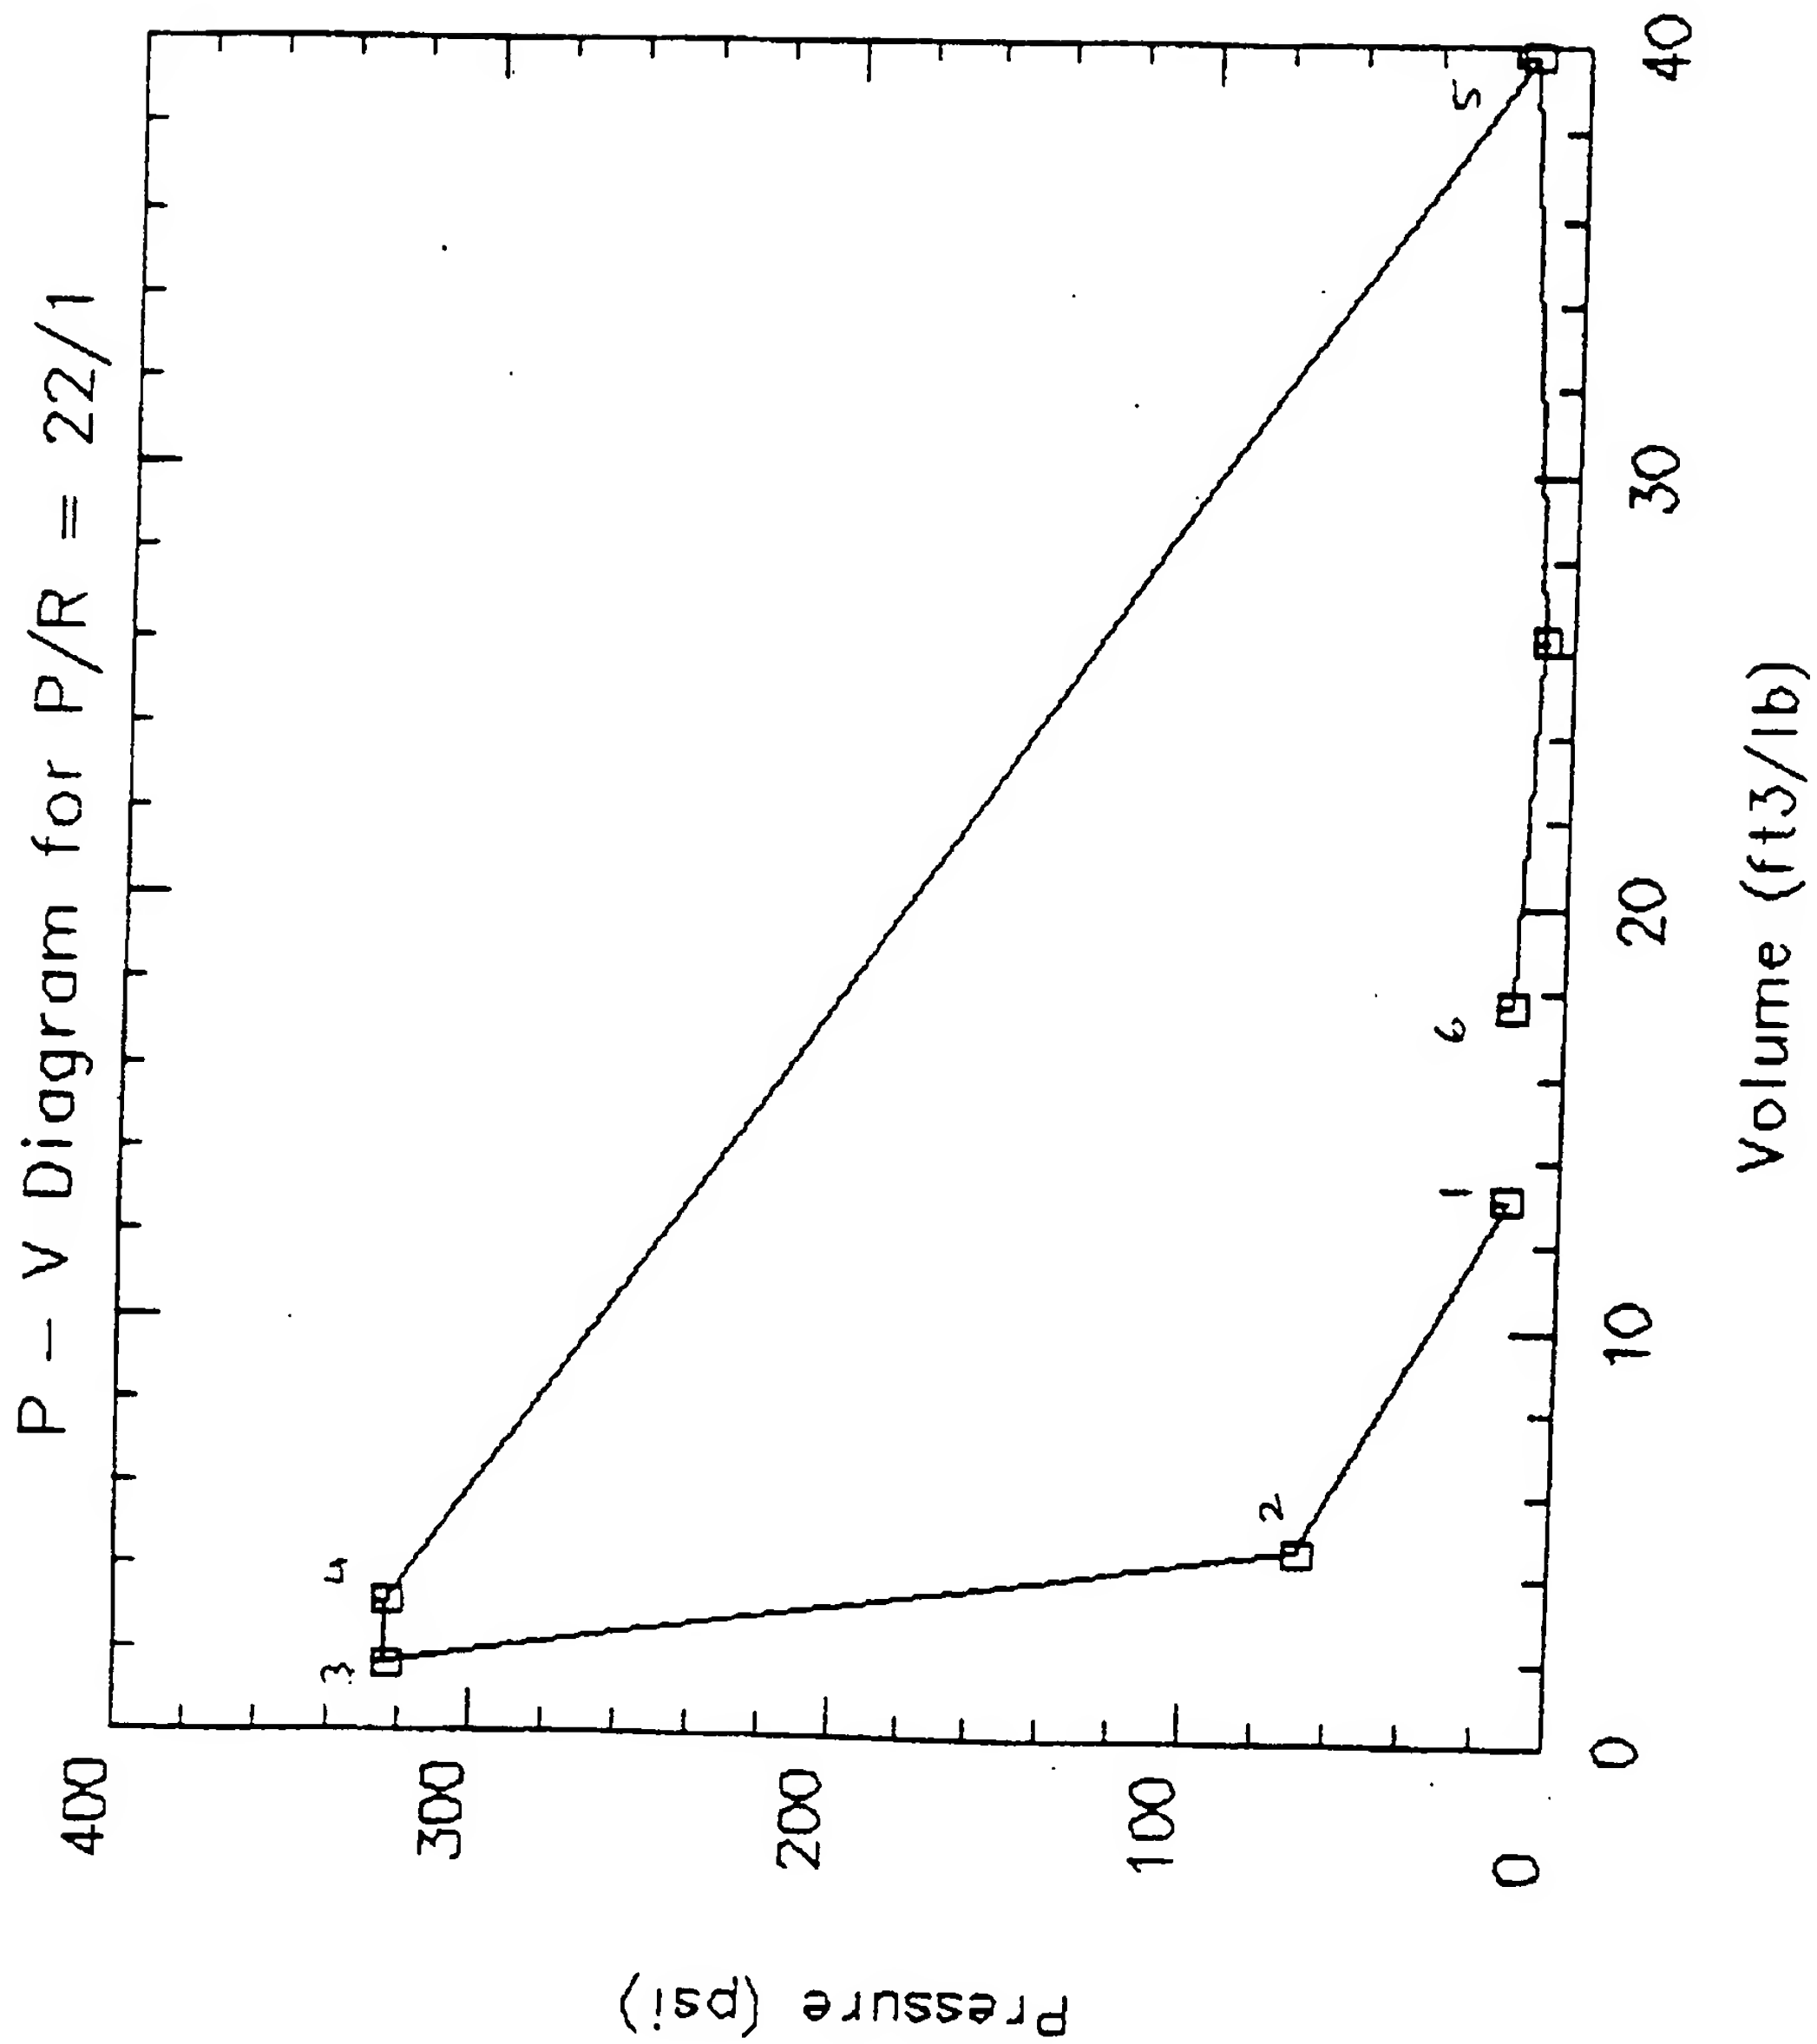


Figure 2

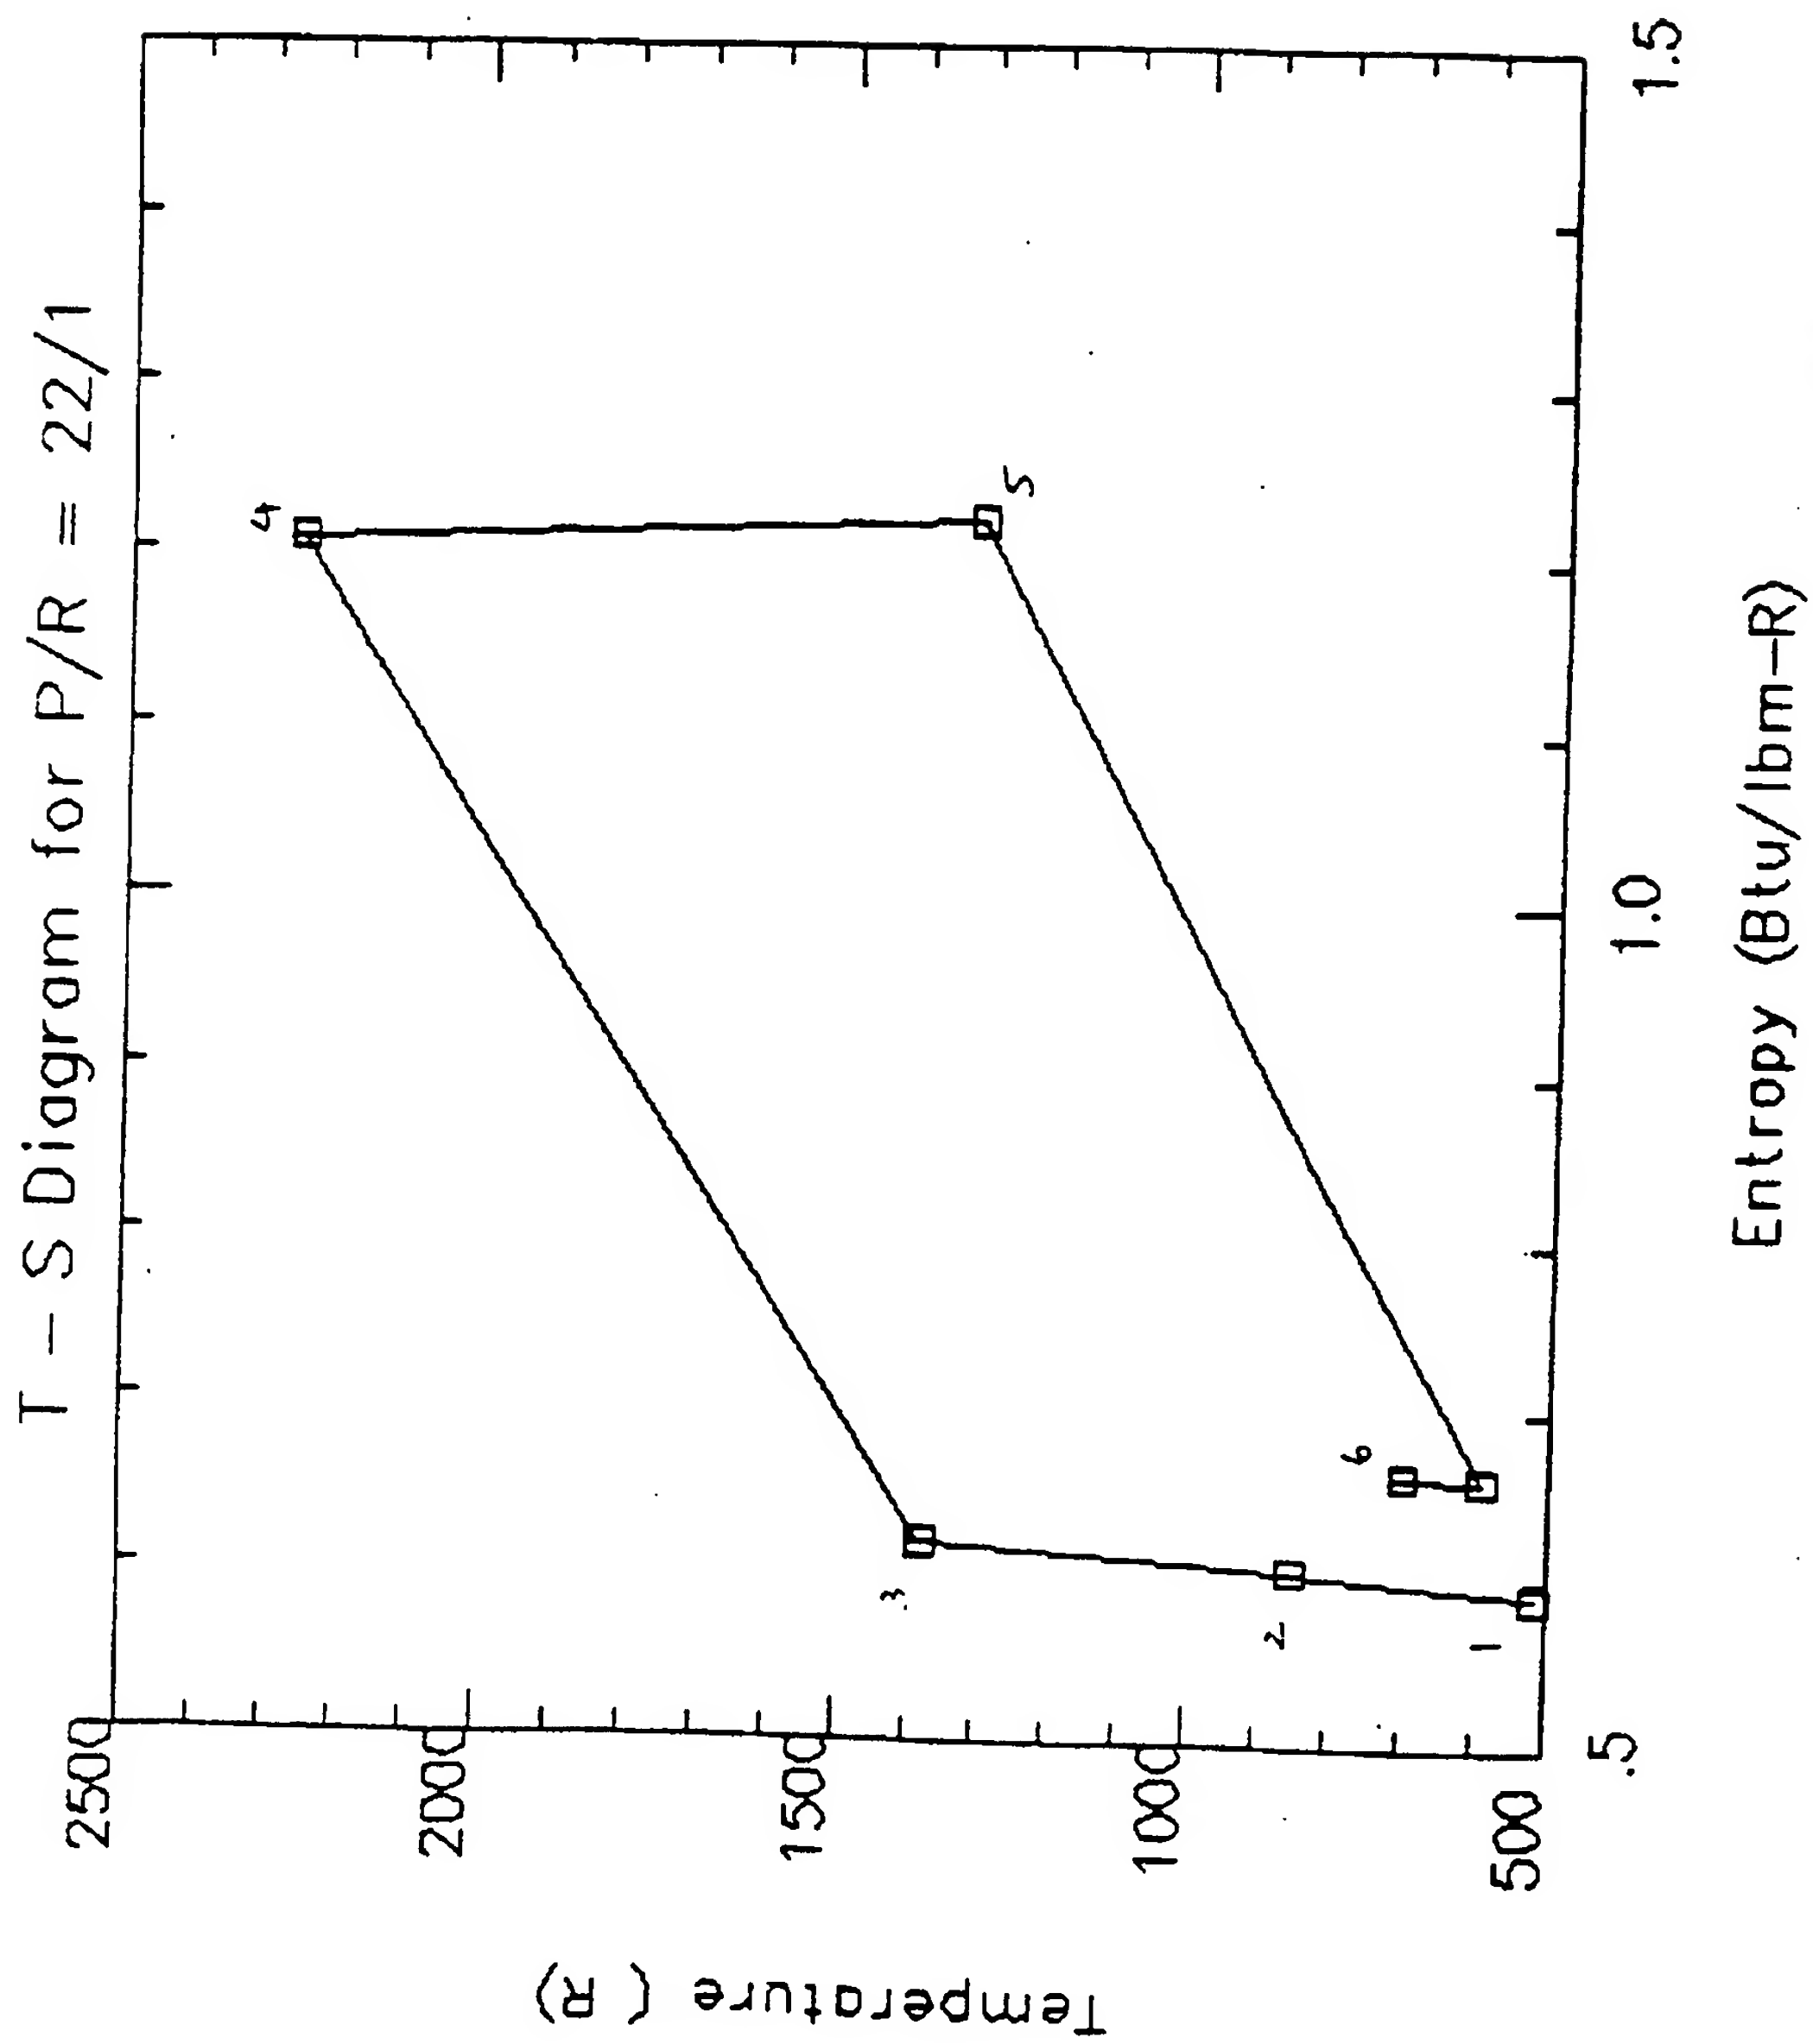
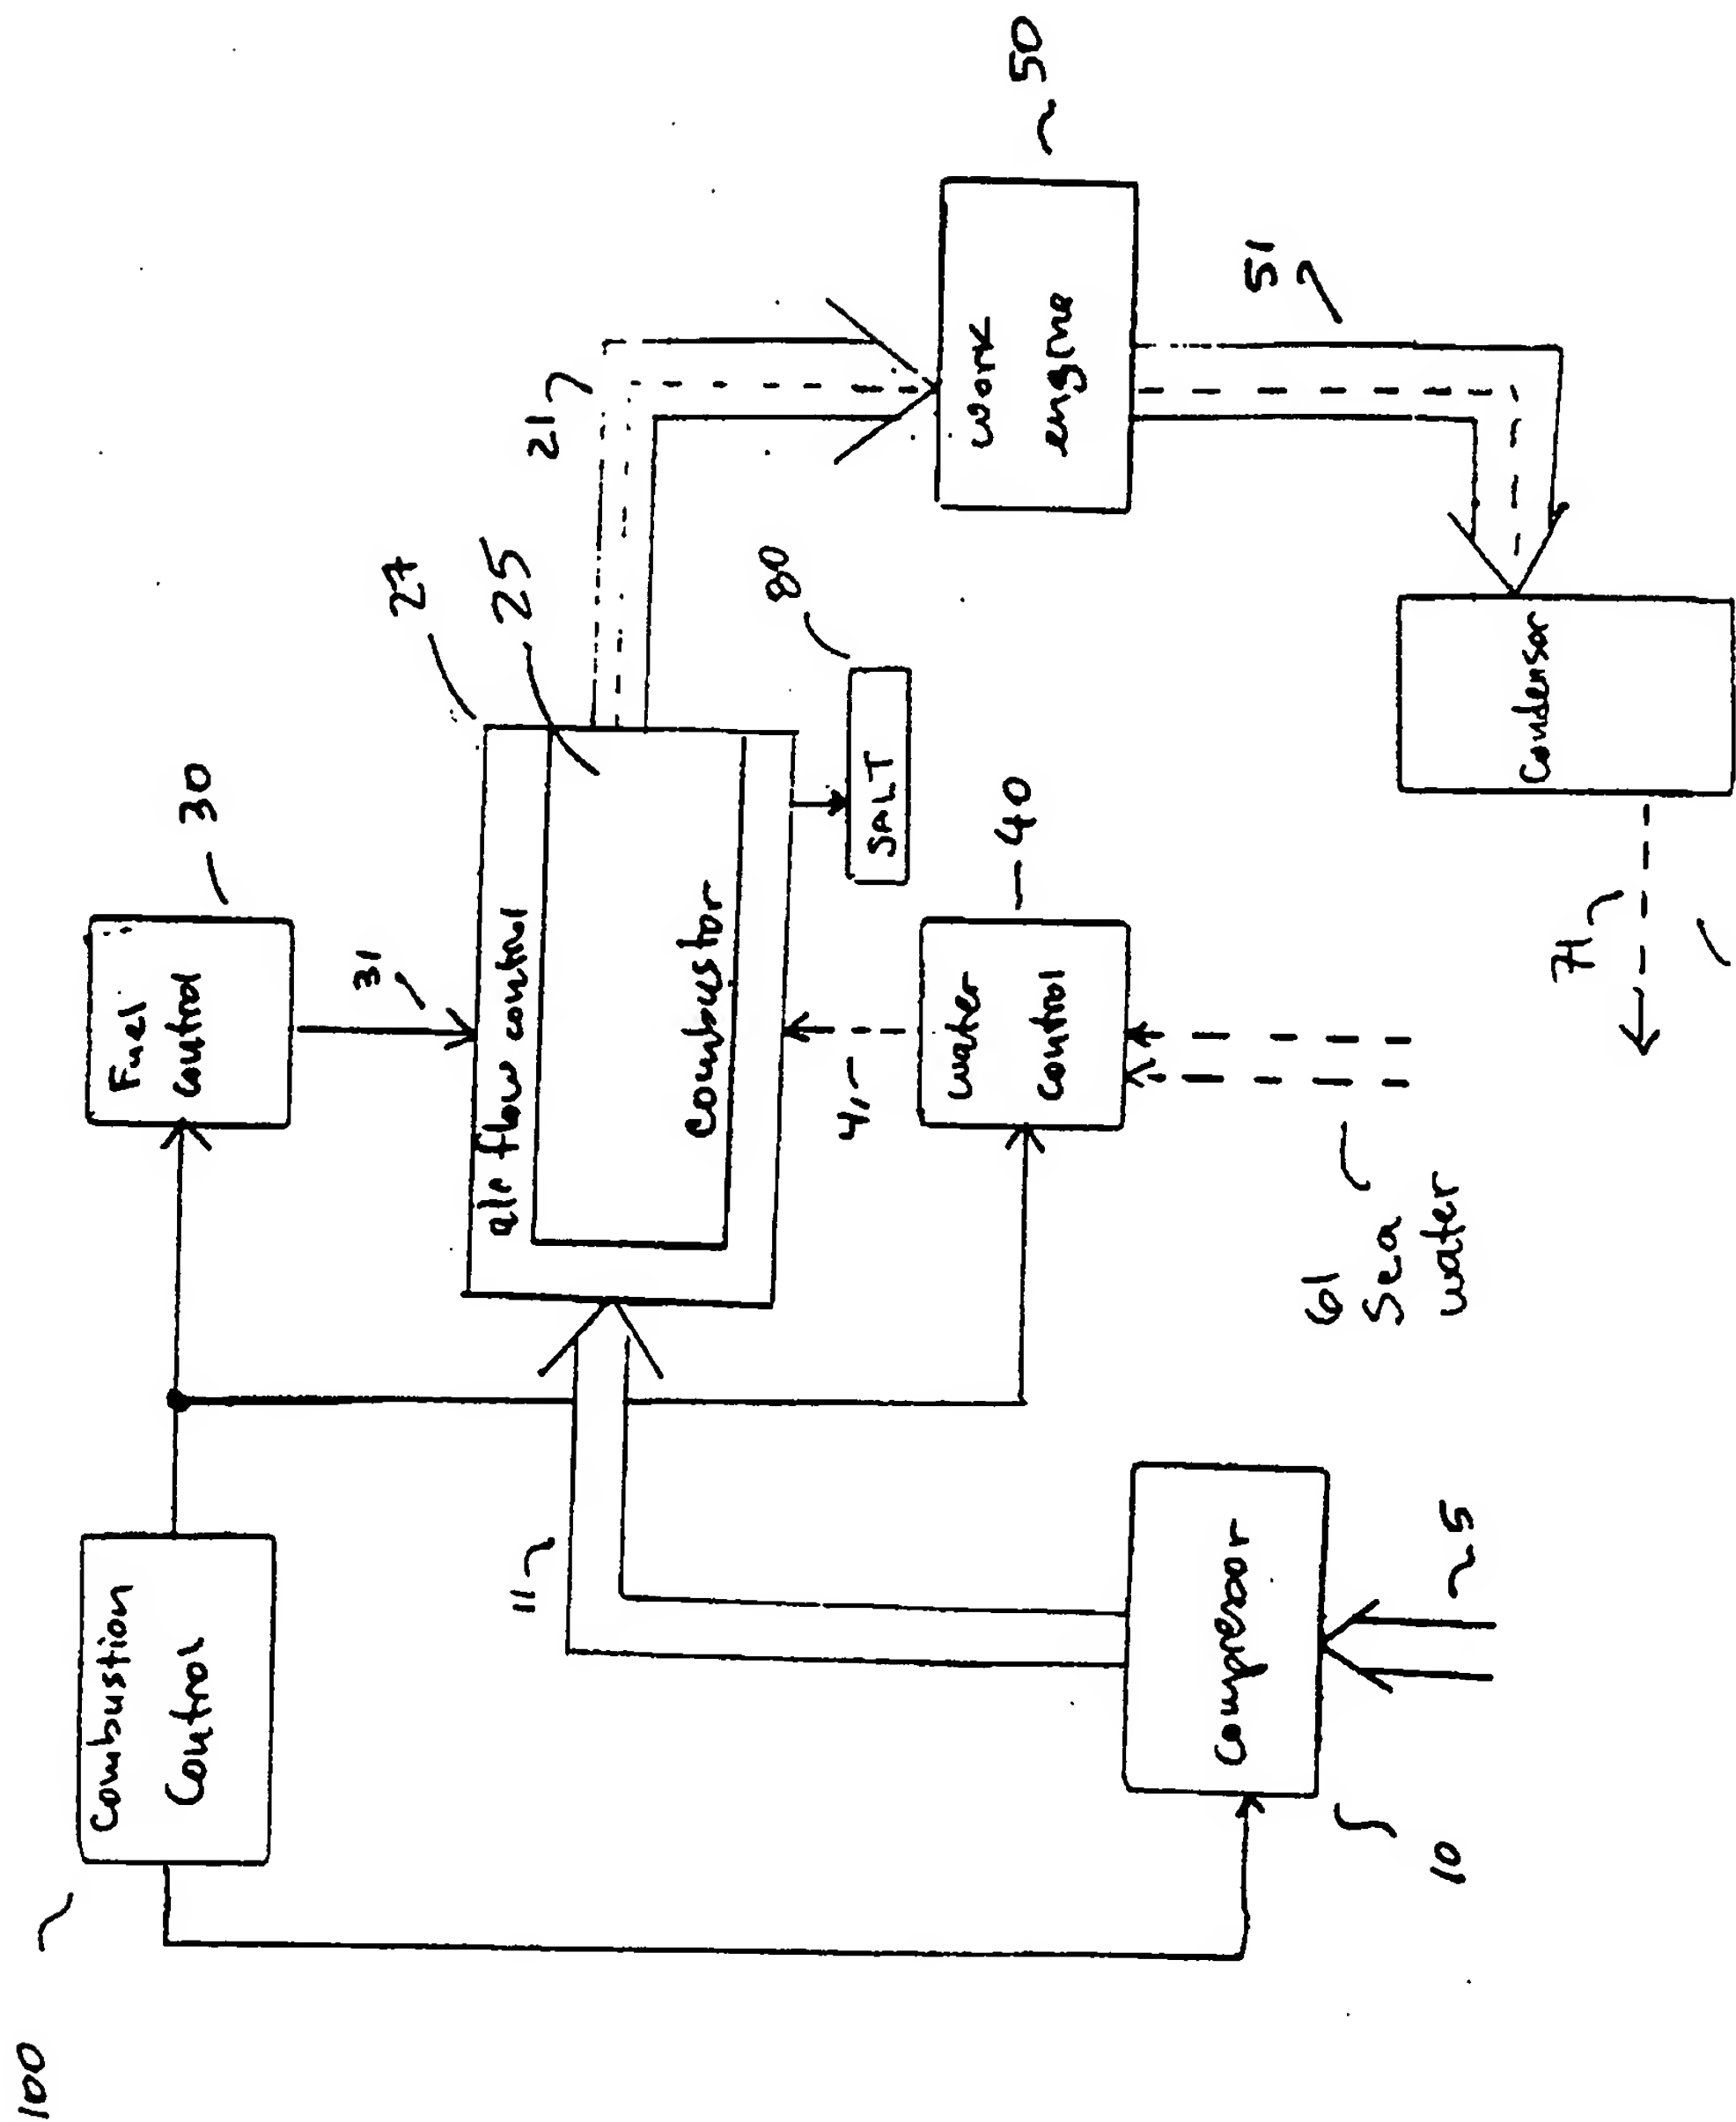


Figure 3

Figure 4



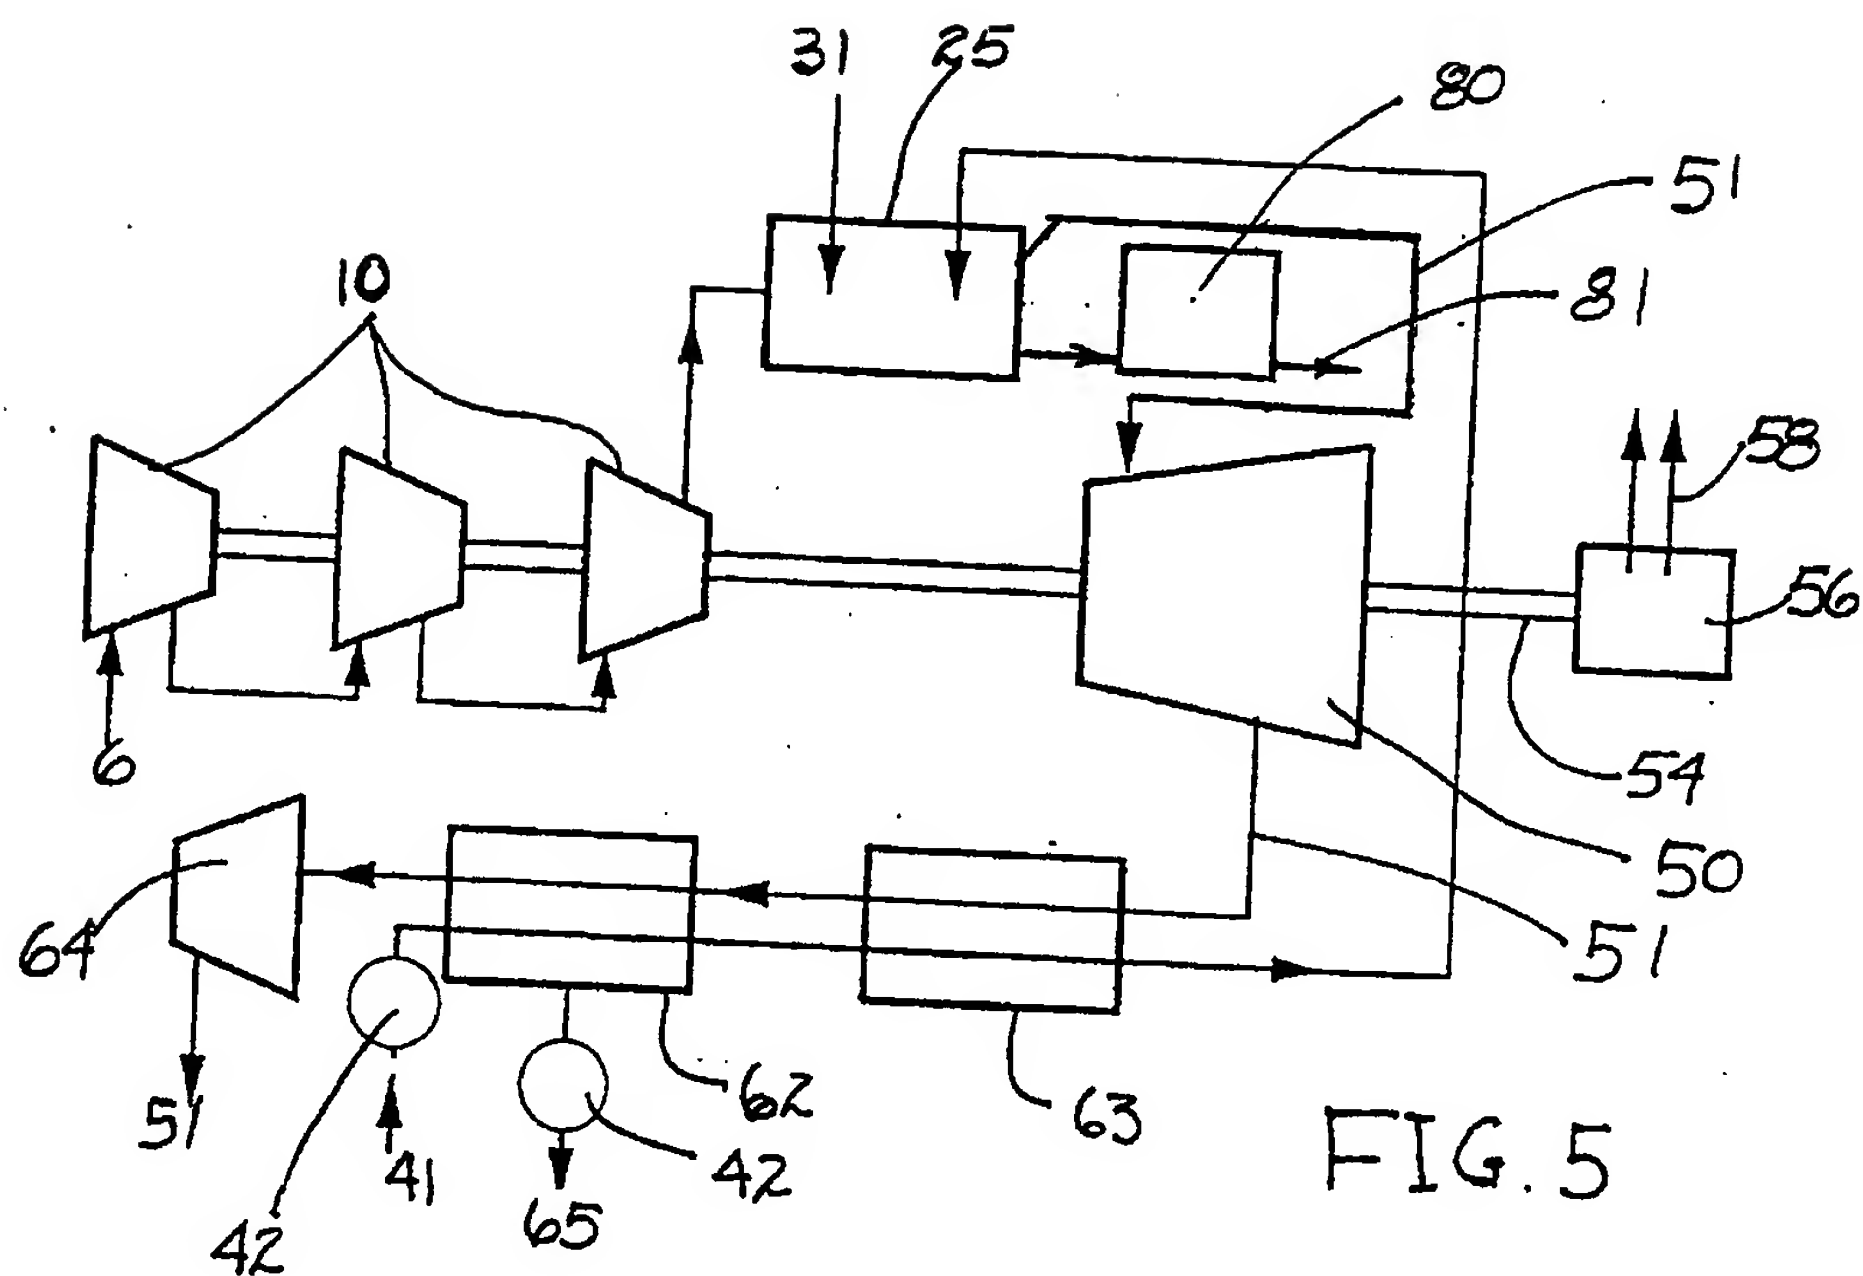


FIG. 5

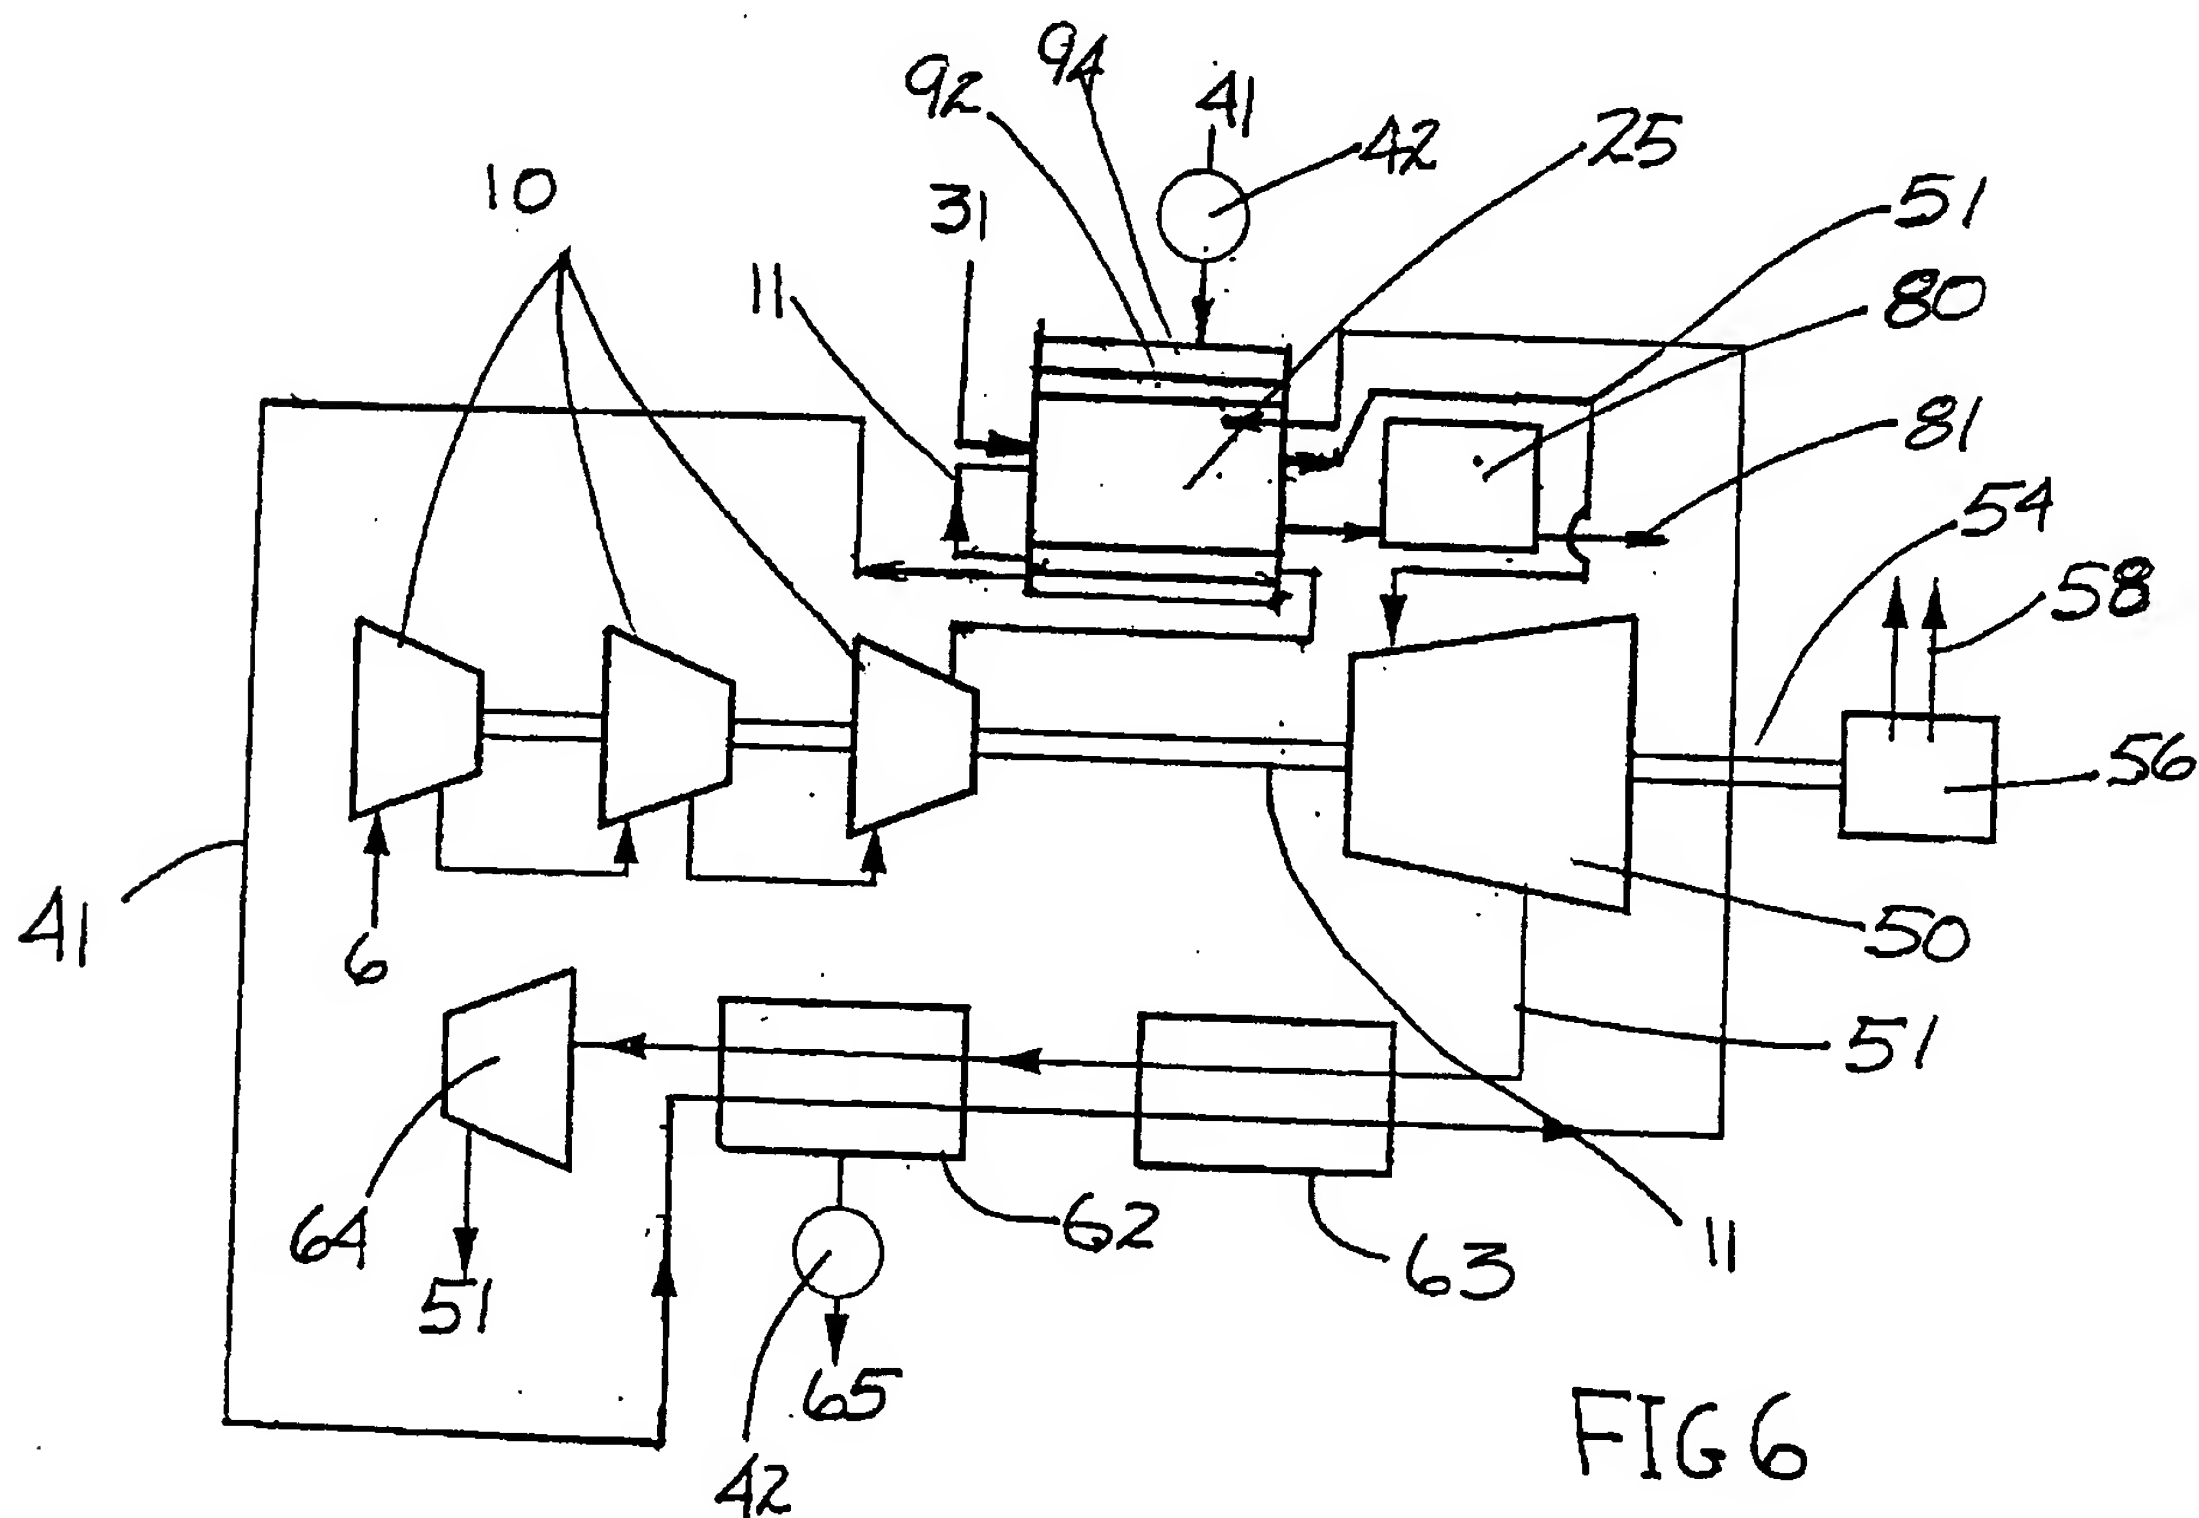


FIG. 6



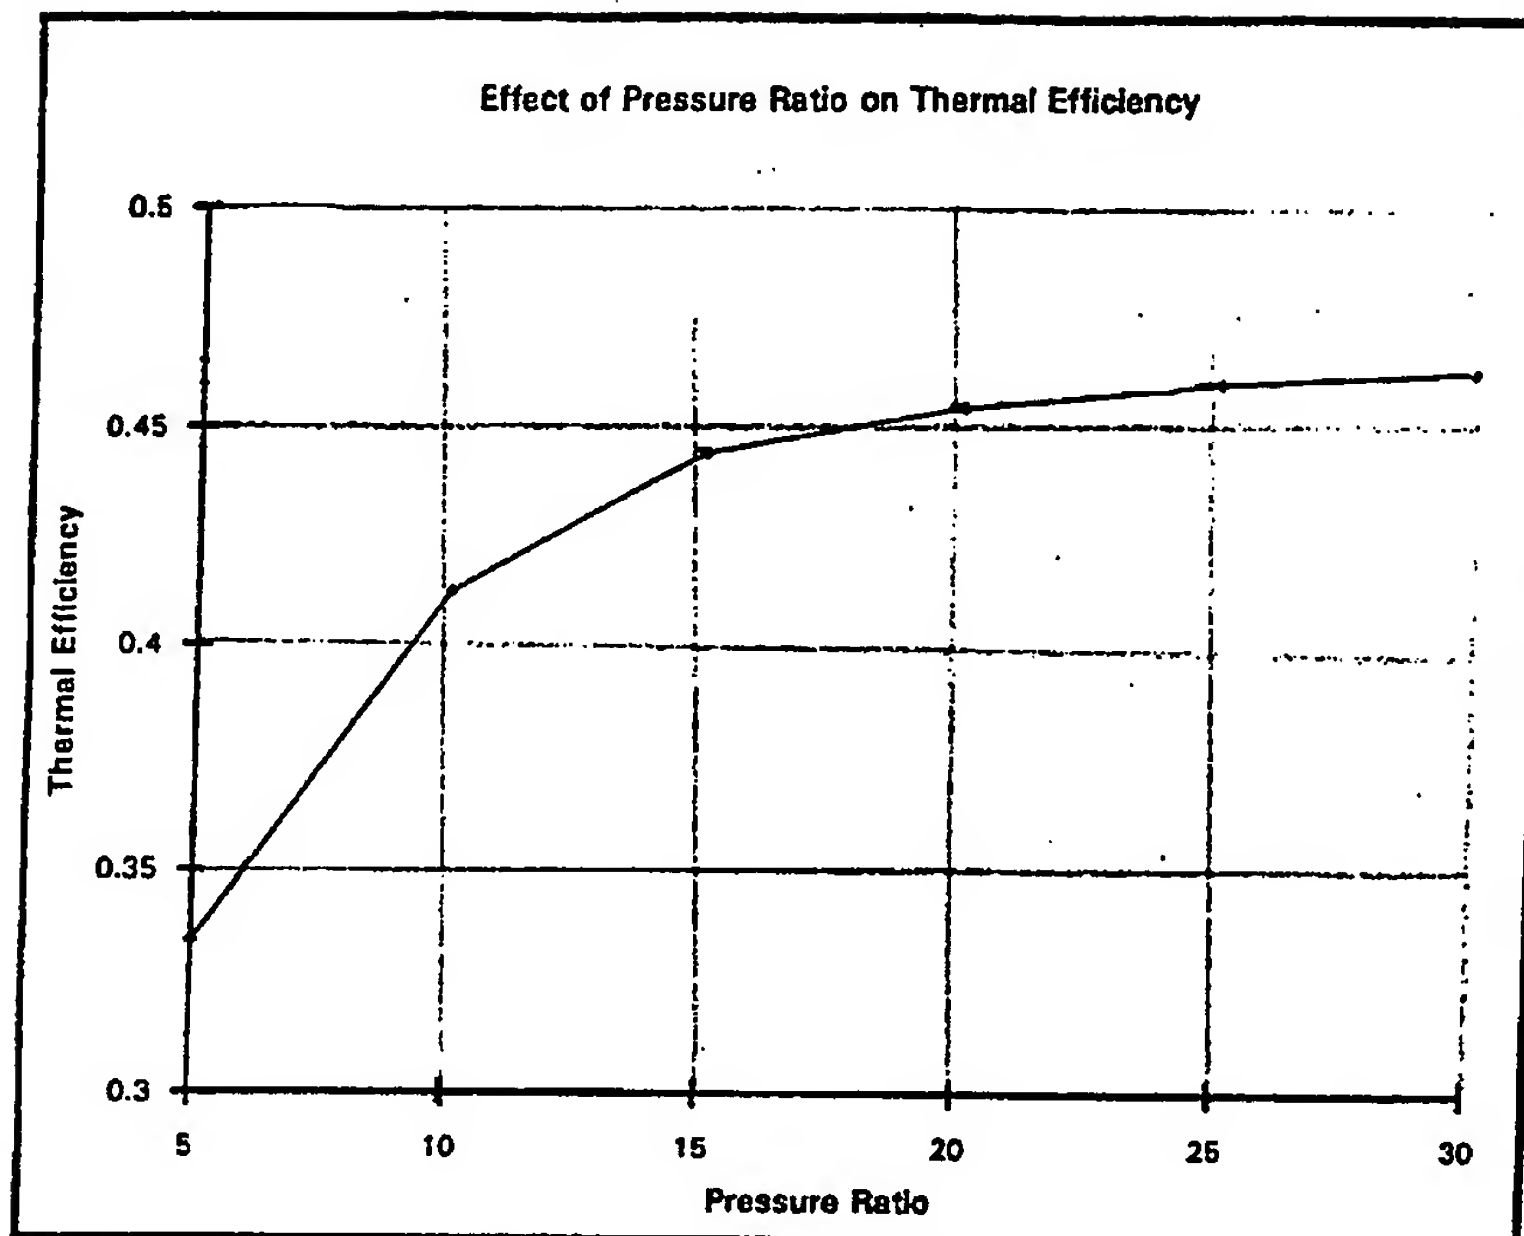


FIGURE 7

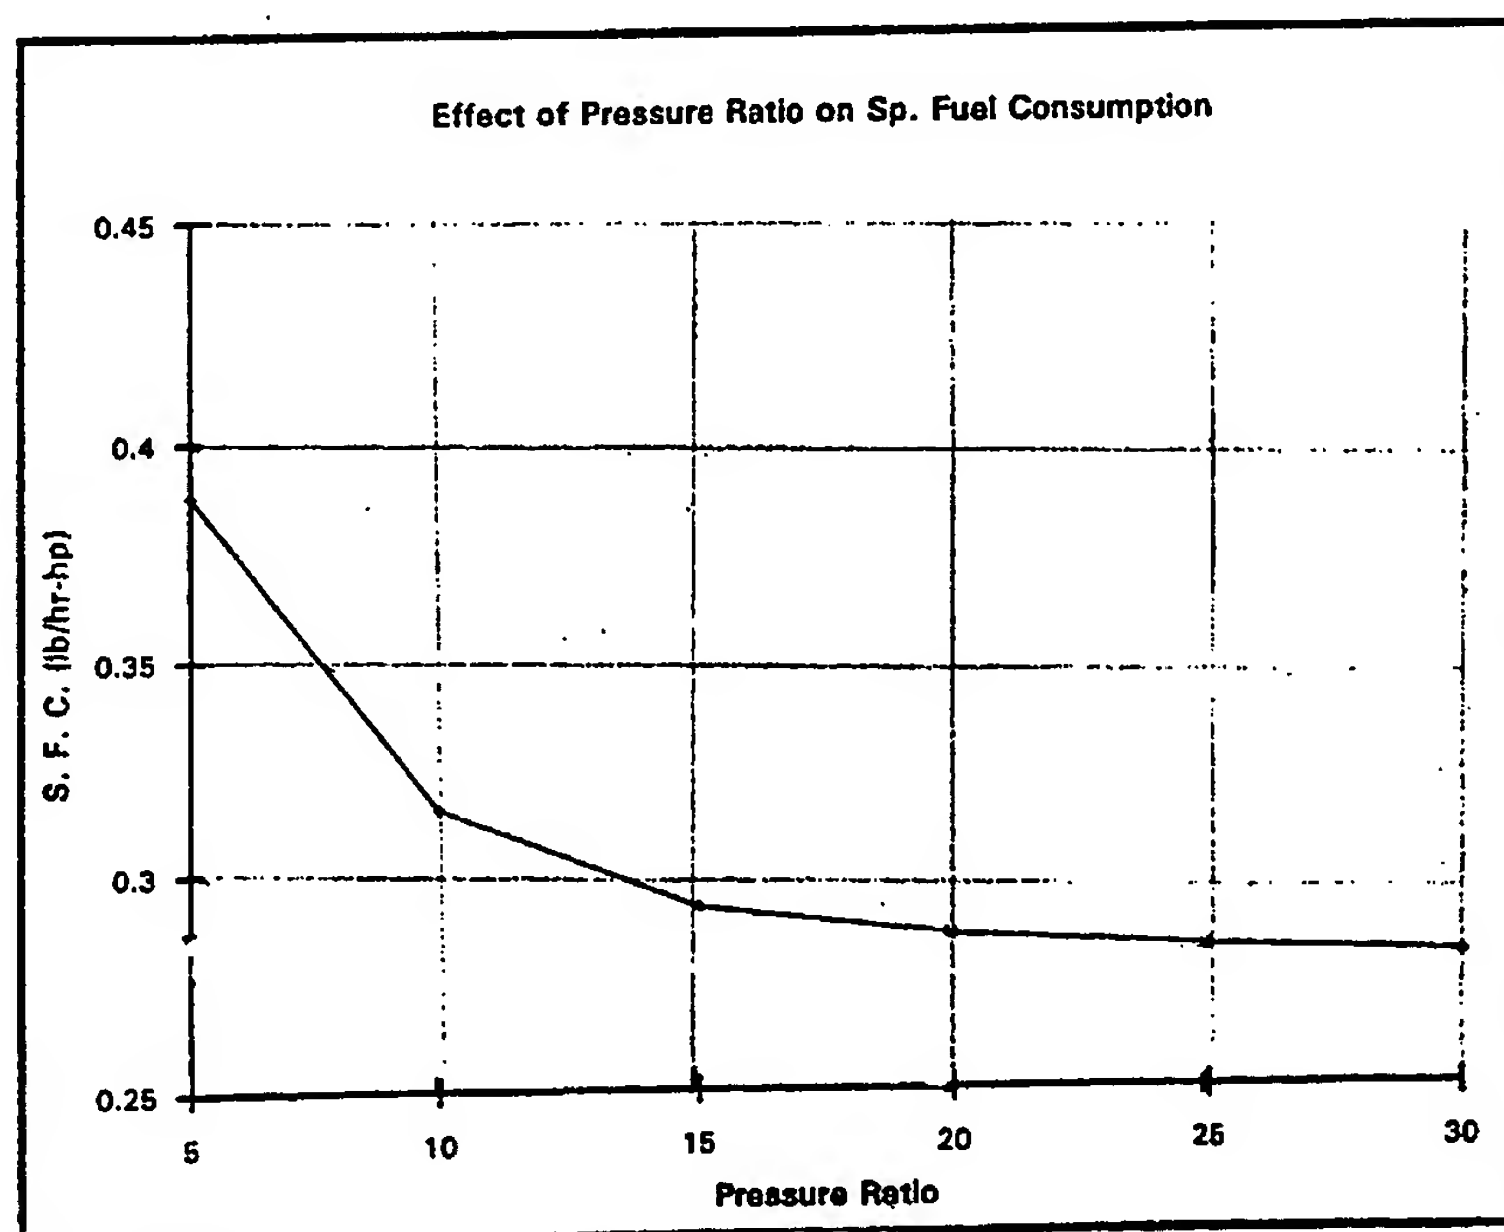


FIGURE 8

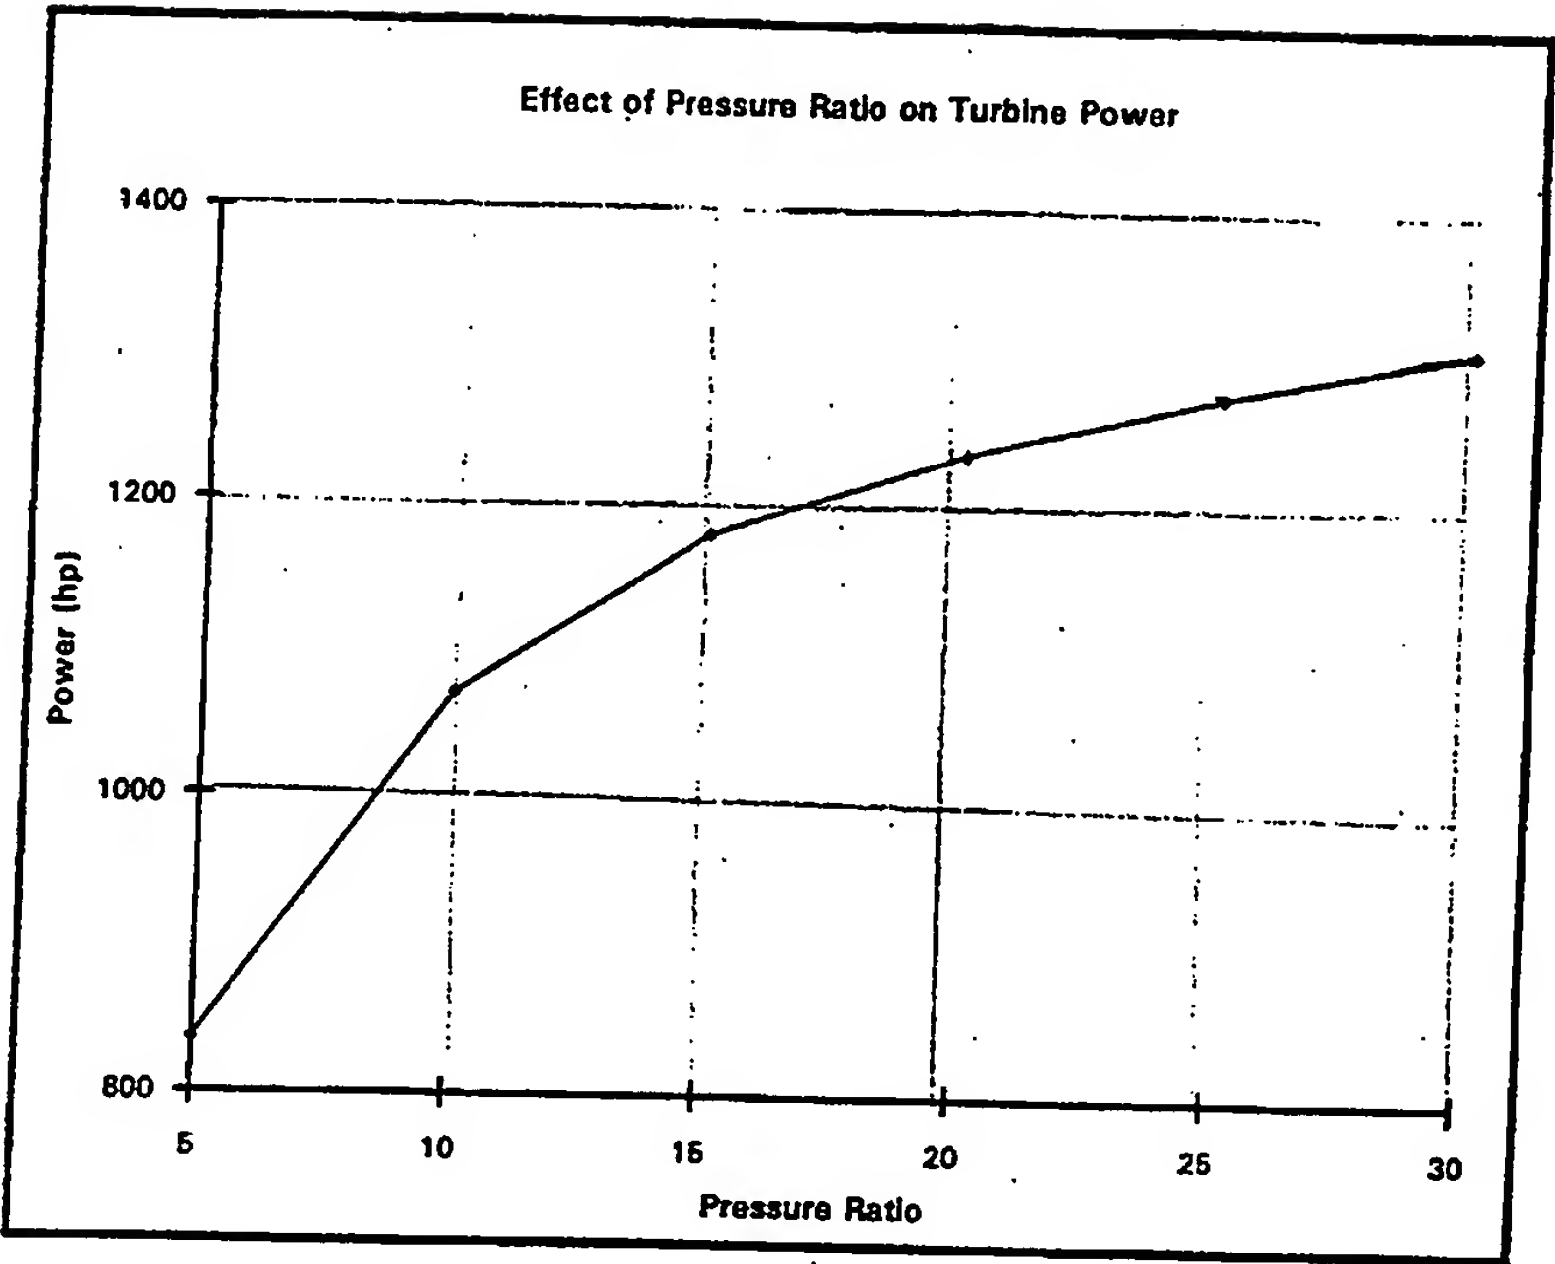


FIGURE 9

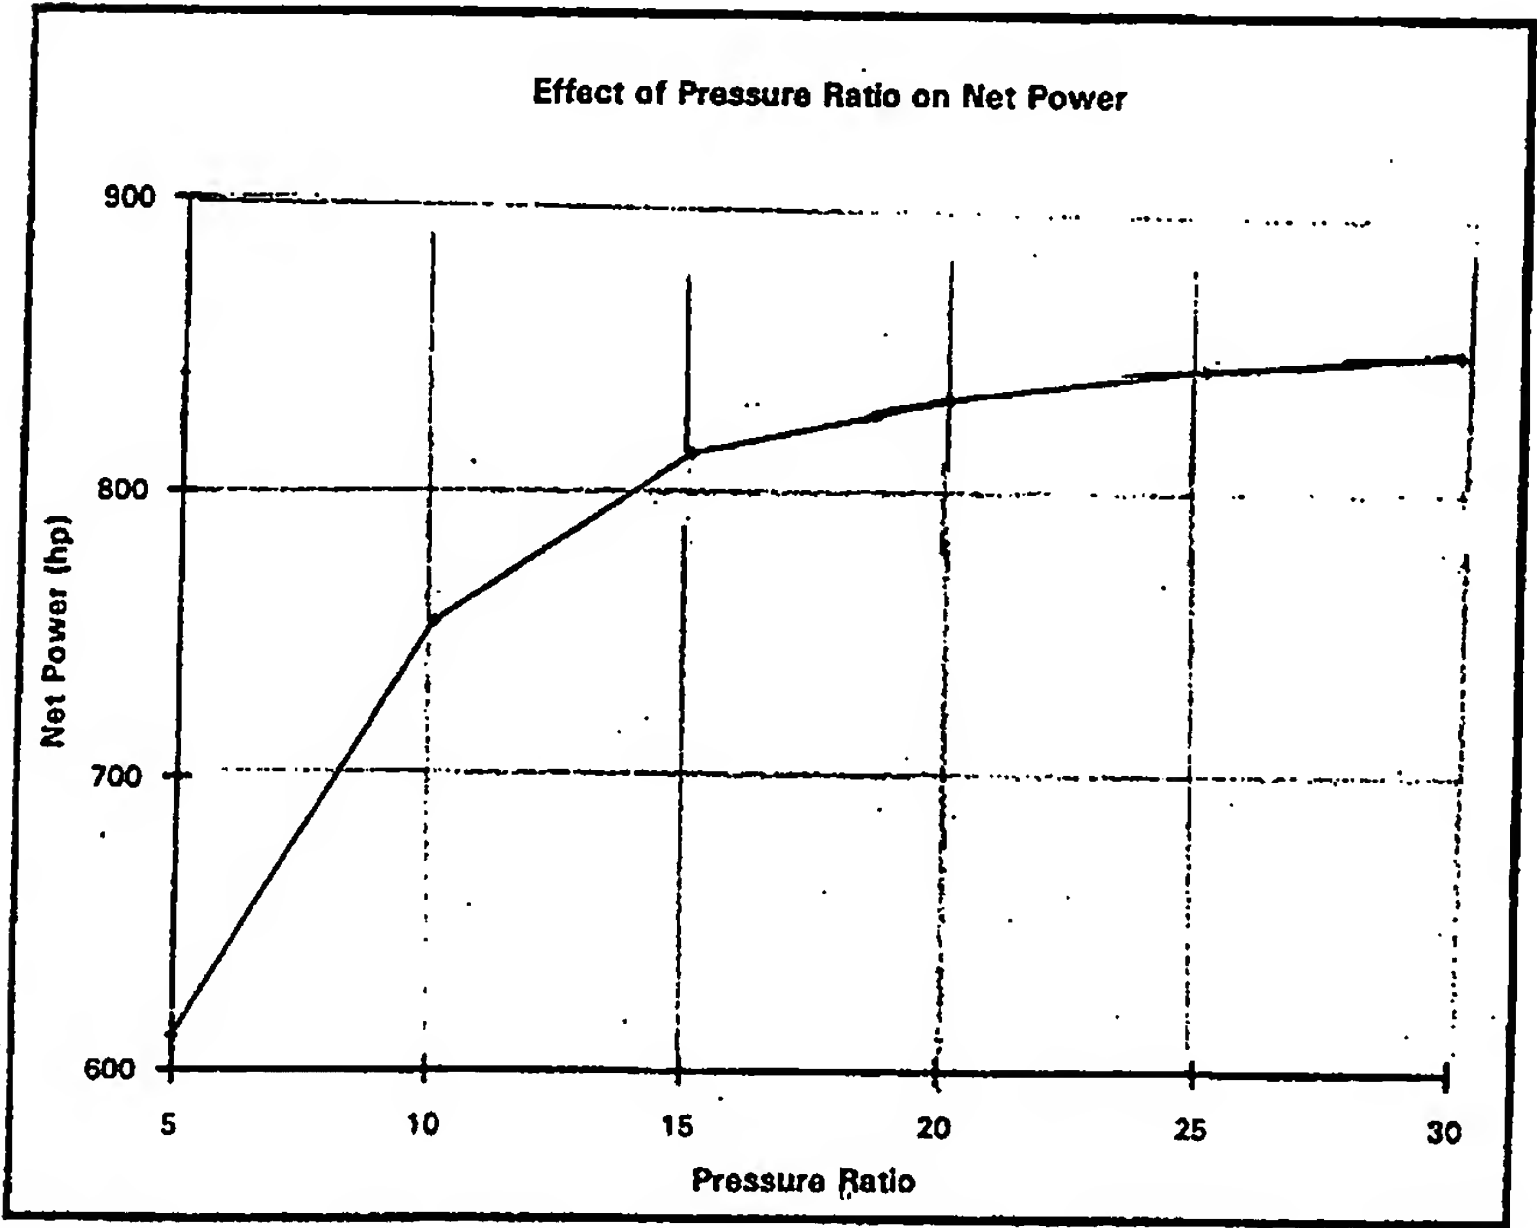


FIGURE 10

## INTERNATIONAL SEARCH REPORT

Int: mal Application No  
PCT/US 93/10280A. CLASSIFICATION OF SUBJECT MATTER  
IPC 5 F01K21/04

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)  
IPC 5 F01K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP,A,0 209 820 (GENERAL ELECTRIC COMPANY) 28 January 1987 see the whole document ---	1-68
A	GB,A,2 158 158 (GENERAL ELECTRIC COMPANY) 6 November 1985 see the whole document ---	1
A	US,A,4 248 039 (CHENG) 3 February 1981 see the whole document ---	1
A	GB,A,2 087 252 (STAL-LAVAL TURBIN AB) 26 May 1982 ---	
A	US,A,4 387 576 (BISSELL) 14 June 1983 ---	
A	US,A,3 885 390 (EVANS) 27 May 1975 -----	

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "I" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

28 February 1994

Date of mailing of the international search report

14.03.94

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+ 31-70) 340-3016

Authorized officer

Mouton, J

# INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No  
PCT/US 93/10280

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0209820	28-01-87	US-A- 4928478 AU-B- 587266 AU-A- 6038786 CA-A- 1272036 JP-B- 5088379 JP-A- 62041936	29-05-90 10-08-89 29-01-87 31-07-90 22-12-93 23-02-87
GB-A-2158158	06-11-85	US-A- 4569195 BE-A- 902277 CA-A- 1229493 DE-A- 3514718 FR-A- 2563575 JP-A- 60256522 US-A- 4660376	11-02-86 25-10-85 24-11-87 31-10-85 31-10-85 18-12-85 28-04-87
US-A-4248039	03-02-81	NONE	
GB-A-2087252	26-05-82	SE-B- 434883 DE-A- 3139209 JP-A- 57097005 SE-A- 8007214	20-08-84 09-06-82 16-06-82 16-04-82
US-A-4387576	14-06-83	US-A- 4249385	10-02-81
US-A-3885390	27-05-75	NONE	